


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.



ELECTRICAL CHARACTERISTICS @ 25°C

ELECTRICAL SPECIFICATIONS:

- | | | |
|---|-------------------------------|--|
| 1.0 TURNS RATIO: | (P6-P5-P4) : (J6-J3) | : 1CT : 1CT ± 3% |
| | (P3-P2-P1) : (J2-J1) | : 1CT : 1CT ± 3% |
| 2.0 INDUCTANCE: | (P6-P4) | : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias |
| | (P3-P1) | : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias |
| 3.0 LEAKAGE INDUCTANCE: | P6-P4 (WITH J6 AND J3 SHORT) | : 0.3 MAX. @ 1MHz |
| | P3-P1 (WITH J2 AND J1 SHORT) | : 0.3 MAX. @ 1MHz |
| 4.0 INTERWINDING CAPACITANCE: | (P6,P5,P4) TO (J6,J3) | : 30pf MAX @ 1MHz |
| | (P3,P2,P1) TO (J2,J1) | : 30pf MAX. @ 1MHz |
| 5.0 DC RESISTANCE: | (J6-J3)=(J2-J1) | : 1.2 ohms Max. |
| RECEIVE | | |
| 6.0 RETURN LOSS: | 1MHz TO 30MHz | : 18dB MIN. |
| | 60MHz TO 80MHz | : 12dB MIN. |
| NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3). | | |
| 7.0 DIELECTRIC WITHSTAND: | (J1, J2) TO (P1, P3) | : 1500 Vrms |
| | (J3, J6) TO (P4,P6) | : 1500 Vrms |
| 8.0 INSERTION LOSS: | RS=RL=100 ohms | : 1.1 dB TYP |
| | 100KHz TO 100MHz | |
| 9.0 RISE TIME: | RS=100 OHMS AND RL = 100 OHMS | : 3.0 nS MAX |
| | OUTPUT VOLTAGE = 1 V peak | : 3.0 nS MAX |
| | PULSE WIDTH= 112nS | |
| 10.0 CROSS TALK: | 1MHz TO 100MHz | : 40 dB TYP |
| 11.0 COMMON TO COMMON MODE ATTENUATION: | | |
| | 30MHz TO 100MHz | : 35dB TYP |

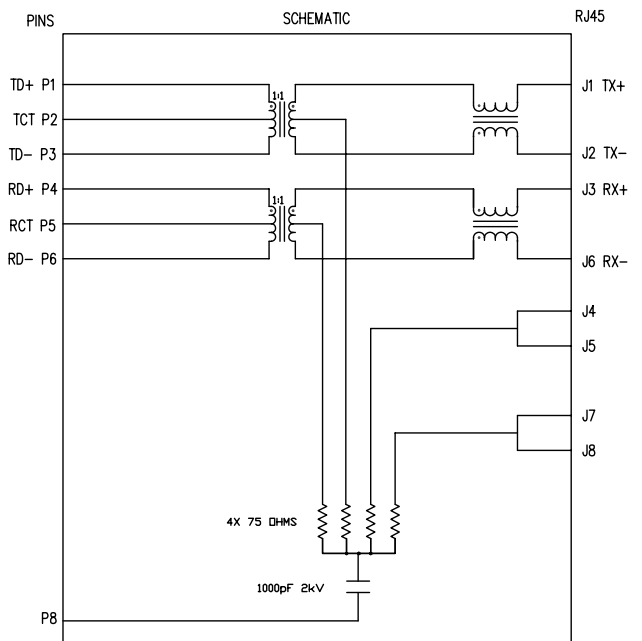

NOTES


1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

ORIGINATED BY Bain Liu	DATE 09-04-08	TITLE MagJack® 10/100BT TAB DOWN, SHIELDED PATENTED	PART NO. / DRAWING NO. SI-60062-F	STANDARD DIM. TOL. IN INCH .X .XX .XXX ±0.005	[] METRIC DIM. AS REFERENCE UNIT : INCH [mm] SCALE : N/A	REV. : B0 SIZE : A4 PAGE : 2	bel COMPONENTS CONNECTED PLANET
----------------------------------	-------------------------	---	---	---	---	------------------------------------	---

FM99185 REV B1

This document is electronically generated. This is a controlled copy if used internally


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.



LED POLARITY
(ENLARGED VIEW)





SINGLE COLOR LED

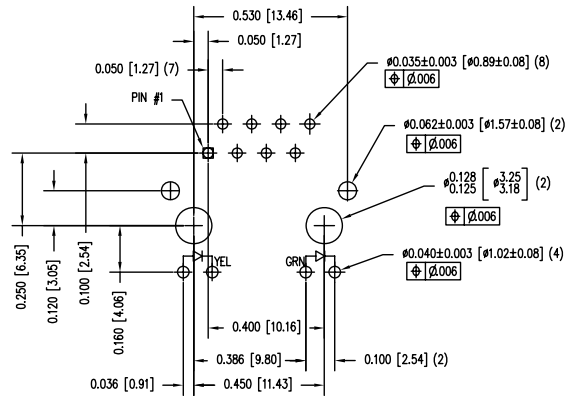

P.C.B. RECOMMENDED HOLE LAYOUT
SEEN FROM COMPONENT SIDE
ALL CENTERLINE DIMENSIONS ARE BASIC

NOTES:

- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACT/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD,
50 MICRO-INCHES MIN. IN CONTACT AREA.
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
- WAVE SOLDER COMPATIBLE - PREHEAT 125°C/90SECS.

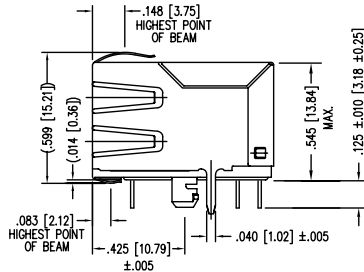



LED SPECIFICATION			
STANDARD LED	WAVELENGTH	Forward V (MAX)	*(TYP)
GREEN	565 nm	2.5 V	2.2 V
YELLOW	590 nm	2.5 V	2.1 V

ORIGINATED BY	DATE	TITLE
Bain Liu	09-04-08	MagJack® 10/100BT TAB DOWN, SHIELDED PATENTED
DRAWN BY	DATE	
LW Yuan	09-04-08	

PART NO. / DRAWING NO.	STANDARD DIM.	[] METRIC DIM. AS REFERENCE
SI-60062-F	TOL. IN INCH	UNIT : INCH [mm]
FILE NAME	.X	SCALE : N/A
SI-60062-F.DWG	.XX	REV. : B0
	.XXX ±0.005	SIZE : A4
		PAGE : 3

COMPONENTS CONNECTED IN PLANE		

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

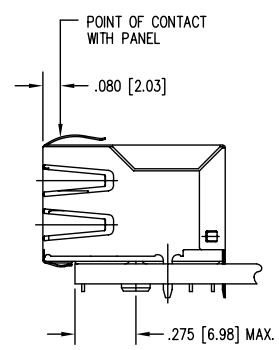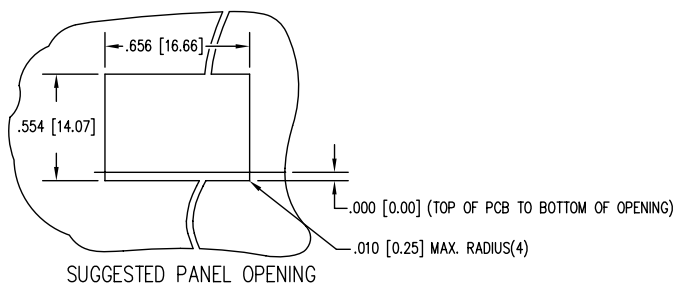

1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ± 0.005 [0.13]

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.	[] METRIC DIM. AS REFERENCE	
Bain Liu	09-04-08	MagJack® 10/100BT TAB DOWN, SHIELDED PATENTED	SI-60062-F	TOL. IN INCH	UNIT : INCH [mm]	REV. : B0
DRAWN BY	DATE		FILE NAME	.X	SCALE : N/A	SIZE : A4
LW Yuan	09-04-08		SI-60062-F.DWG	.XX		PAGE : 4
			.XXX	± 0.005		



FM99185 REV B1

This document is electronically generated. This is a controlled copy if used internally