

**MATERIAL:**  
 Shell : PA 66 UL94 V0  
 Coupling nut : PA 66 UL94 V0  
 Insert : PA 66 UL94 V0  
 Coupling spring : Stainless steel  
 O'seal : Nitril  
 Backshell : PA 66 UL94 V0

**PERFORMANCE CHARACTERISTICS:**  
 Operating temperature : -40°C up to 85°C  
 Corrosion salt spray : 500 hours salt spray  
 Durability : 250 matings and unmatings  
 Sealing : IP67  
 RJ45 component : Cat 5 E

**NOTES :**

UTS6 JC 18 RJ \* 25

Plug UTS

Backshell type JC



Shell size

Insert arrangement

Insert polarisation :  
 - N : standard version  
 - A, B : Different orientations

Specification 25  
 Backshell Ø capacity 7 / 16 mm

**POLARIZATION  
 ALTERNATIVE KEY WAY POSITION**

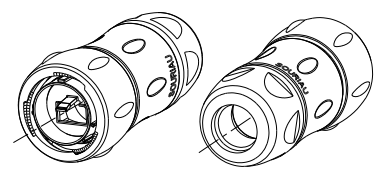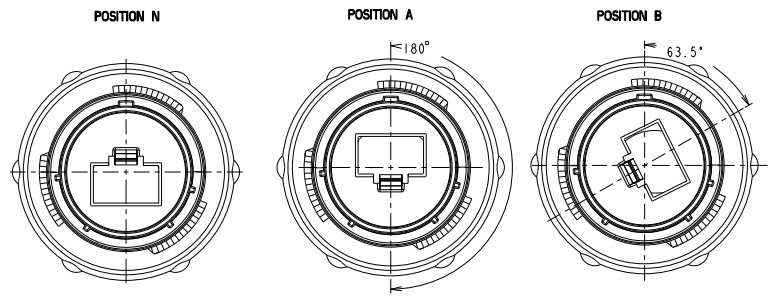

ISS	09/12/08	DATE	ADD SPECIFICATION N°25	DESIGNED BY	RAGAINEM	DATE	16/02/07	PROJECT	CUSTOMER DRAWING
TITLE	CONNECTEUR UTS RJ 45 CAT5 EQUIPEMENT								
Scale	1/1	General linear	Tolerances: ±0.2	NPRDS / PROJECT UTSI					
FORMAT	A2	SOURIAU DRG N°		WWW.SOURIAU.COM				This document is the property of SOURIAU. It must not be reproduced or communicated without permission.	
UTS6JC18RJ-X-C								FORMAT	A2
								SHEET	1 / 1