

VS-08-T-RJ45/IP67

Order No.: 1688696

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688696>

RJ45 sleeve housing, IP67, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, for cable cross section 5.0 mm ... 6.5 mm

Ethernet

Commercial data	
EAN	4017918863616
Pack	5 pcs.
Customs tariff	85472000
Weight/Piece	0.01547 KG
Catalog page information	Page 170 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
05/03/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 6.5 mm
Cable exit	Straight
Color	gray
Tightening torque max.	2.5 Nm

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

Material data

Inflammability class acc. to UL 94	V0
Housing material	PA
Material, O-ring	FPM
Cable seal material	NBR
Degree of protection	IP67

Accessories


Item	Designation	Description
General		
1688573	VS-08-ST-RJ45	RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 26 and solid wires AWG 26 ... 24

Protective covers

1653757	VS-SCRJ-PC	IP67 protective cover, for covering the male inserts in the sleeve housings IP67, VS-SCRJ-..., VS-04-..., VS-06-... and VS-08-...
---------	------------	---

Diagrams/Drawings

Dimensioned drawing

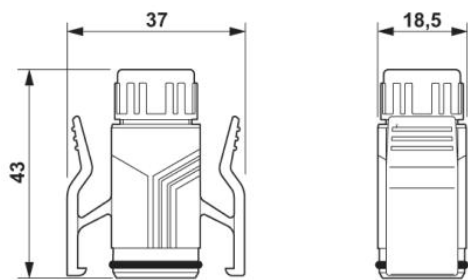

RJ45 sleeve housing IP67

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;