


THE DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	APPD
00				
C1	22MAR11	REVISED PER ECO-11-005033	RK	HMR

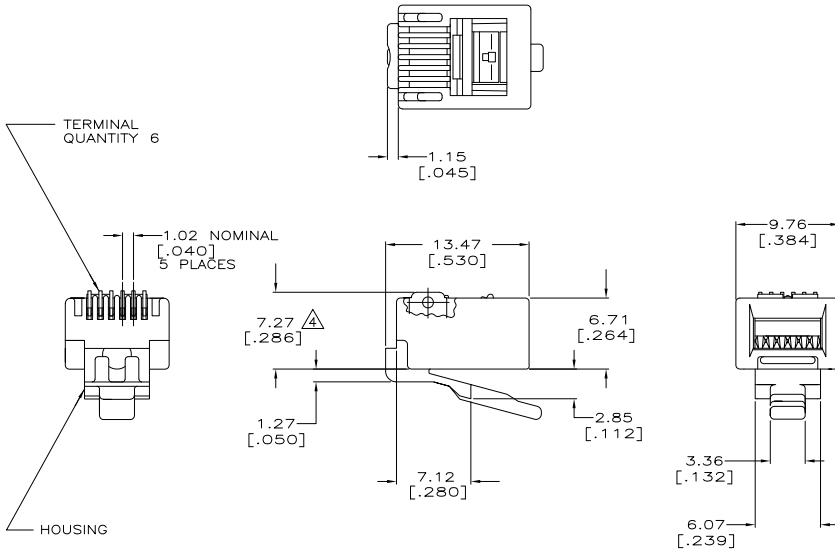

- ⚠ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ⚠ MATERIAL: HOUSING- POLYCARBONATE BLUE. TERMINAL- PHOSPHER BRONZE PLATED WITH 1.27μm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 2.54μm [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG SOLID WIRE, 0.74-0.86 [.029-.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 6.61 [.090 X .260] MAXIMUM.
- ⚠ TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- ⚠ 1000 ASSEMBLIES PER PACKAGE.
- ⚠ 100 ASSEMBLIES PER PACKAGE.

5-557970-3
5-557970-2
PACKAGED PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN L. HALL	2PFE8008	TE Connectivity	
DIMENSIONS: mm[INCHES]		DR B. MCNEILL	2PFE8008	MODULAR PLUG ASSEMBLY, 6 POSITION, LINE, SMALL CONDUCTOR, SOLID WIRE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD B. MCNEILL	2PFE8008	RESTRICTED TO	
Ø	FRACTION	DECIMAL	ANGLE	SIZE	CAGE CODE
1/16	1/16	0.0625	108-1163	A2	00779
1/32	1/32	0.03125	APPLICATION SPEC	DRAWING NO	557970
1/64	1/64	0.015625	114-6016	WEIGHT	-
1/128	1/128	0.0078125	WEIGHT	CUSTOMER DRAWING	-
1/256	1/256	0.00390625	SCALE	4:1	SHEET 1 of 1
1/512	1/512	0.001953125	SCALE	4:1	REV C1