


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
HM	00				
	P1	REVISED PER ECO-11-005033	21MAR11	RK	HMR

- △ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- △ MATERIAL: HOUSING—POLYCARBONATE,CLEAR. TERMINAL—0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27μm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54μm[.000100] THICK NICKEL UNDERPLATE.
- △ PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING AN INSULATION DIAMETER RANGE OF 0.89—0.99[.035—.039] AND A MAXIMUM OVAL CABLE JACKET OF 2.29 X 6.61 [.09 X .260].
- △ TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- △ 1000 ASSEMBLIES PER PACKAGE.
- △ 100 ASSEMBLIES PER PACKAGE.
- △ 25 ASSEMBLIES PER PACKAGE
- △ REELED PRODUCT ON STRIP DOES NOT HAVE VOID CORING ILLUSTRATED ON THIS DRAWING.

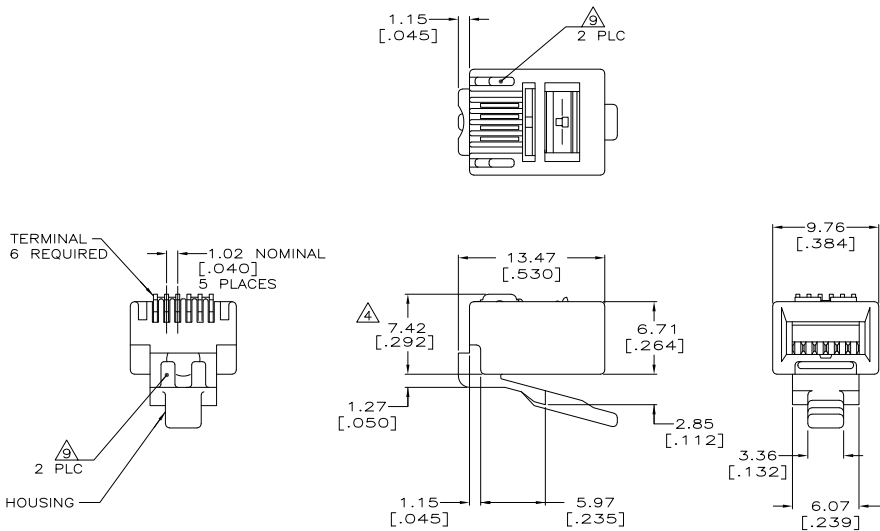

△ △	5-555042-4
△ △	5-555042-3
△ △	5-555042-2
OBSOLETE △ △	555042-1
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY	DATE	TE Connectivity	
DIMENSIONS: INCHES		L. HALL	12062007	TE Connectivity	
OTHER DIMENSIONS: MILLIMETERS		S. MCNEILL	12062007	MODULAR PLUG ASSEMBLY, 6 POSITION, SOLID WIRE	
MATERIAL		B. MCNEILL	12062007	RESTRICTED TO	
FINISH		PRODUCT SPEC	108-1163	SIZE	CAGE CODE
		APPLICATION SPEC	114-6016	A2	00779
		WEIGHT	-	DRAWING NO.	C-555042
		CUSTOMER DRAWING		SCALE	4:1
				SHEET	1 of 1
				REV	P1