

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
HM	00	F	LR	DATE	BY
		V1		REVISED PER ECO-11-005033	11MAR11 RK HMR

- 1 MATERIAL: HOUSING - POLYCARBONATE, CLEAR. TERMINAL - 0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27µm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54µm [.000100] THICK NICKEL UNDERPLATE.
- 2 ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 3. PLUG WILL ACCEPT 0.74-0.99[.029-.039] DIA. STRANDED WIRE, 26 OR 28 AWG, WITH A 5.33[.210] DIAMETER MAXIMUM JACKET.
- 4 TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 5 100 ASSEMBLIES PER PACKAGE.

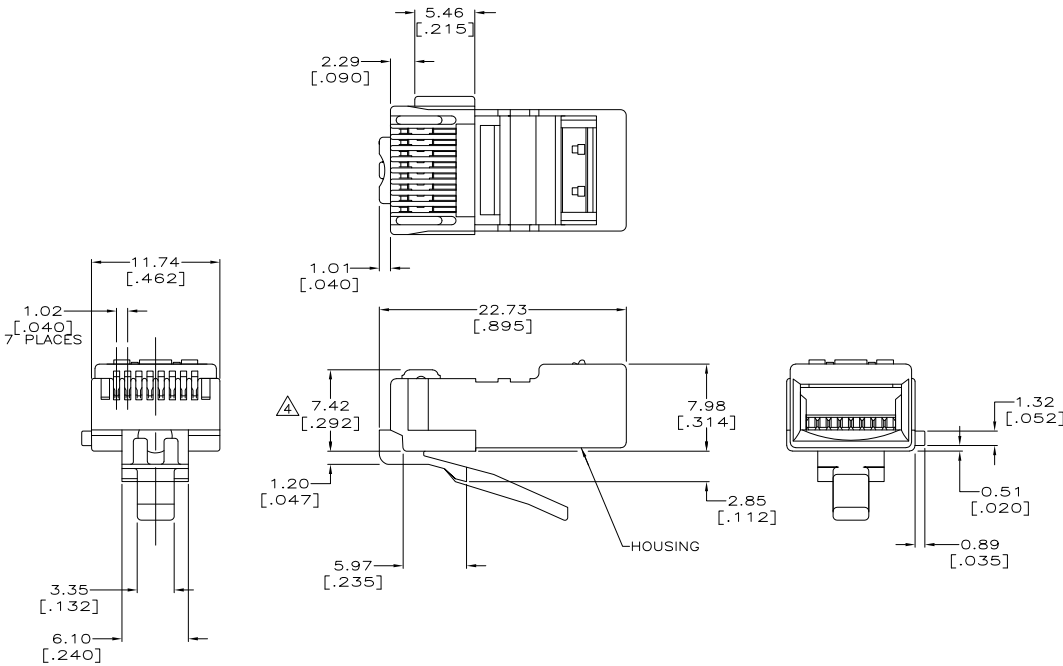

5-554170-3	PACKAGED	PART NUMBER
------------	----------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN D. RESETH/WJA 08-DEC-94	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK N. JONES 26-JUN-95	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APD E. LAURER 26-JUN-95	TE Connectivity	
0 PLG ± .010		NAME 108-1163	MODULAR PLUG ASSEMBLY, 8 POSITION, ROUND CABLE, KEYED	
1 PLG ± .010		APPLICATION SPEC 114-6016	SIZE A2	RESTRICTED TO
2 PLG ± .010		WEIGHT 1.36 GRAMS	CAGE CODE 00779	DRAWING NO C-554170
3 PLG ± .010		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 of 1
4 PLG ± .010				REV V1
ANGLES ± .5°				
FINISH				

1471-9 (3/11)

554170

A