

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LNK	DESCRIPTION	DATE	BY
HM	00			
	H1	REVISED PER ECO-11-005033	11MAR11	RK HMR

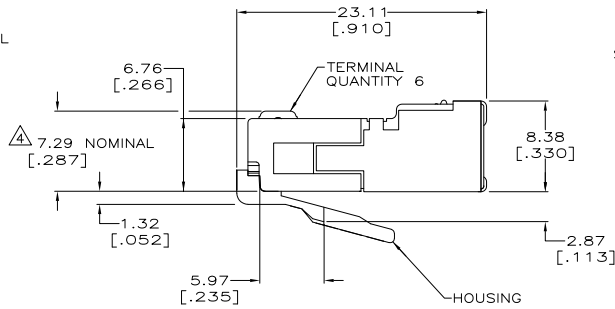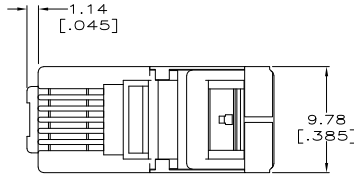

DETAIL A
LATCH POSITION AFTER CRIMPING
SCALE 10:1

- 1. MATERIAL: HOUSING - POLYCARBONATE, CLEAR.
TERMINAL - 0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27µm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54µm[.000100] THICK NICKEL UNDERPLATE.
SHIELD - 0.25[.010] THICK COPPER ALLOY, SATIN NICKEL PLATED.
- 2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 3. PLUG WILL ACCEPT 0.74-0.99[.029-.039] DIAMETER STRANDED WIRE, 26 OR 28 AWG, WITH A .180 DIAMETER MAXIMUM JACKET.
- 4. TERMINATED DIMENSION: 6.15[.242] MAXIMUM.
- 5. LATCH SHALL BE IN POSITION SHOWN IN DETAIL "A" AFTER CRIMPING.
- 6. 500 ASSEMBLIES PER PACKAGE.
- 7. 100 ASSEMBLIES PER PACKAGE.

5-555175-3
5-555175-2
PACKAGED PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	11 MAR 87	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK	18 MAR 87	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRN	31 MAR 87	TE Connectivity	
0 PLC	±	DRN		MODULAR PLUG ASSEMBLY, 6 POSITION, LONG BODY, SHIELDED, ROUND CABLE, STRANDED WIRE	
1 PLC	±	DRN		RESTRICTED TO	
2 PLC	±	DRN		RESTRICTED TO	
3 PLC	±	DRN		RESTRICTED TO	
4 PLC	±	DRN		RESTRICTED TO	
ANGLES	±	DRN		RESTRICTED TO	
MATERIAL	△	DRN		RESTRICTED TO	
FINISH	△	DRN		RESTRICTED TO	
APPLICATION SPEC:		SIZE	A2	CAGE CODE (DRAWING NO)	C-555175
WEIGHT:		SCALE	4:1	SHEET	1 of 1
CUSTOMER DRAWING		REV	H1		