
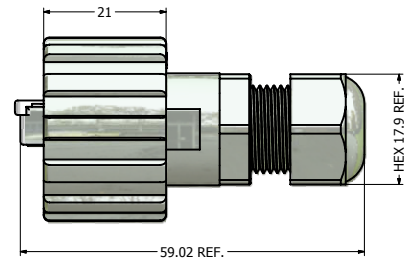
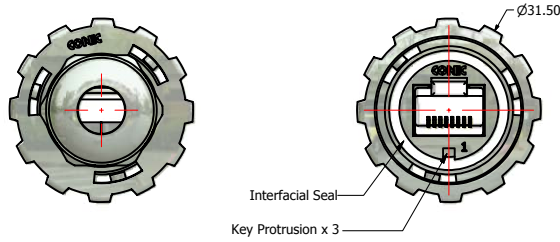


6 5 4 3 2 1

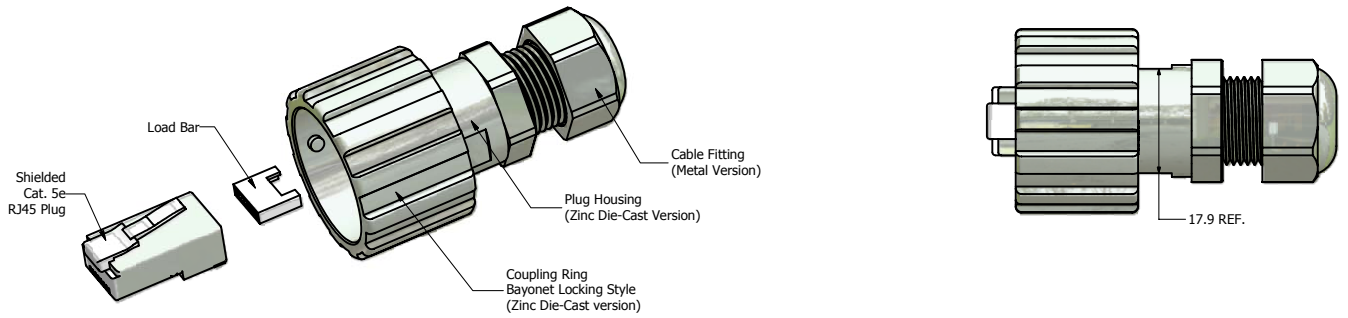

Notes:

- Electrical Specifications:
 - Meets EIA/TIA-568-B.2 Cat.5e Specification
 - Contact Resistance: 20mOhm max.
 - Insulation Resistance: 500MOhm min. @ 100 VDC
 - Current Rating: 1.2A max. at 25°C
 - Working Voltage: 100 VDC
 - DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
 - Operating Temperature: -40°C to +85°C
- Material and Finish:
 - Coupling Ring and Plug Housing: Zinc Die-Cast, Nickel Plated
 - Interfacial Seal: Silicone, Color: White
 - Cable Fitting: Brass, Nickel Plated
 - Cable Fitting Rubber Ring: NBR, Color: Black
 - RJ45 Plug Metal Shell: Copper Alloy, Nickel Plated
 - RJ45 Plug Plastic Housing: Clear Polycarbonate UL94 V-0
 - RJ45 Plug Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel
- RJ45 Plug accepts both Stranded and Solid Cables with Outer Diameter of 4.83mm to 6.73mm
- Metal Cable Gland accepts Cable Outer Diameter Range of 4.5mm to 8mm
- RoHS compliant
- IP67 rated when fully mated with the appropriate mating connector

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING AND THESE DIMENSIONS ARE UNLESS OTHERWISE SPECIFIED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT THE WRITTEN PERMISSION OF CONEC CORPORATION. DO NOT ALTER CAD DRAWING BY HAND	Customer:		Tolerance Unless otherwise specified		Autodesk Inventor	Scale: 1.5:1	Dim. in mm	
	Name	Title	Approval Date	0 PLC ±0.10 1 PLC ±0.38 2 PLC ±0.51 3 PLC ±0.10 ANGLES ±3°		2009	Date	Name
					Draw.	Dec 07	Vincent Ke	Drawing No.: 17K1A147 Part No.: 17-101794
					Appd.	Dec 07	J. Chaudry	
					Norm			
				D-old				
	a	original					DIN A3	
Rev.	Changes	Date	Name				Sheet 1/1	

6 5 4 3 2 1