
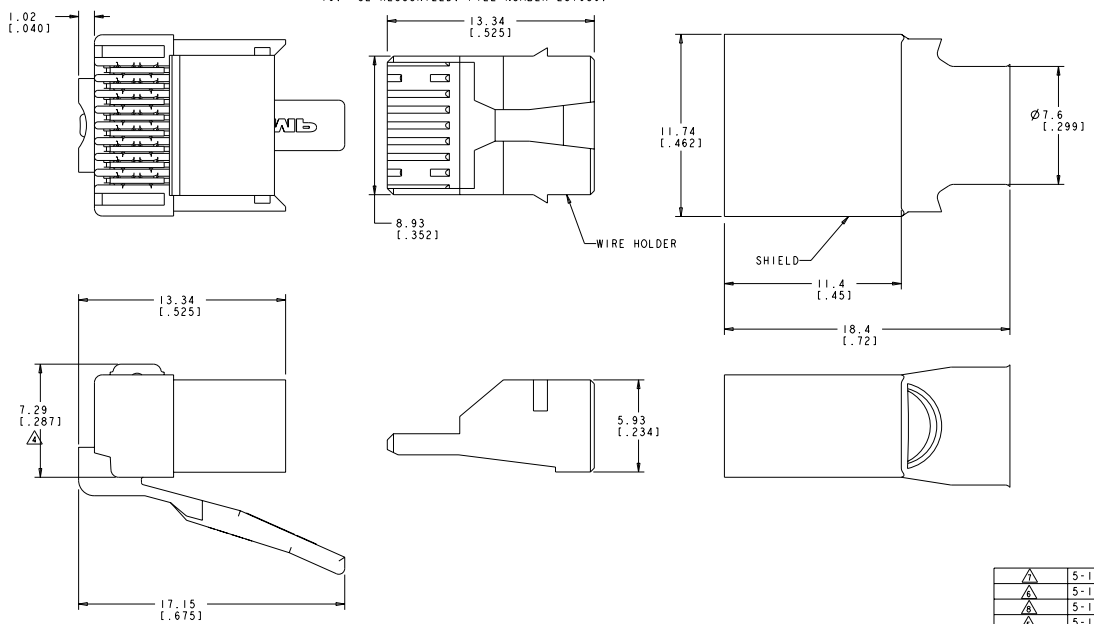


REVISONS		DATE	BY	APP
A	RELS: NPR NSD02-005		JLUMBI	GS MD
B	REV: ECO-96-023369		ELCOTINA	GS CO
C	REV: ECO-96-023659		ELCOTINA	GS CC
D	REV ECO-98-011917		ELCOTINA	LN DM

- △ MATERIAL: HOUSING - 94V-0 RATED POLYCARBONATE CLEAR TERMINAL - 0.36 [.014] THICK PHOSPHAR BRONZE PLATED WITH 1.27 μ m [.00050] MINIMUM THICK GOLD IN LOCALIZED AREA. GOLD FLASH OVER THE REMAINDER. OVER 2.54 μ m [.00100] MINIMUM THICK NICKEL UNDERPLATE. WIRE HOLDER - POLYCARBONATE MAKROLON CLEAR. SHIELD - BRASS DIN 17660 - CuZn33
- △ DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- 3. PLUG WILL ACCEPT A 24-26 AWG STRANDED CONDUCTOR, PROVIDED THE INSULATION CONDUCTOR DIAMETER IS WITHIN .89 - 1.09 [.035 - .043]; WITH THE SUM OF DIAMETERS FOR ALL EIGHT CONDUCTORS WITHIN THE CABLE MUST NOT EXCEED 7.8MM [.31 IN]. CABLE JACKET DIAMETER OF 6.0 - 7.0MM [.24 - .28 IN].
- △ TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- △ PACKAGE 1,000 ASSEMBLIES, 1,000 WIRE HOLDERS, AND 1,000 SHIELDS.
- △ PACKAGE 100 ASSEMBLIES, 100 WIRE HOLDERS, AND 100 SHIELDS.
- △ PACKAGE 25 ASSEMBLIES, 25 WIRE HOLDERS, AND 25 SHIELDS.
- △ PACKAGE 500 ASSEMBLIES, 500 WIRE HOLDERS, AND 500 SHIELDS.
- 9. MODULAR PLUG BOOT, PART NUMBER 1711510-X (X-DENOTES VARIOUS COLORS), MAY BE USED WITH KIT ASSEMBLY SHOWN.
- 10. UL RECOGNIZED: FILE NUMBER E81956.

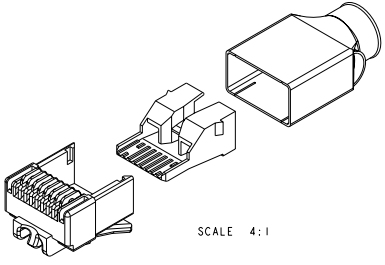

△	5-1479184-4
△	5-1479184-3
△	5-1479184-2
△	5-1479184-1
△	PACKAGE PART NO.

DATE: 24 JAN 02 BY: GABRIEL CHECKED BY: DELPHIAS TITLE: STRANDED WIRE, CATEGORY 6 SPECIFICATION SHEET: 116-13035 MATERIAL: POLYCARBONATE FINISH: CLEAR		DATE: 24 JAN 02 BY: GABRIEL CHECKED BY: DELPHIAS TITLE: STRANDED WIRE, CATEGORY 6 SPECIFICATION SHEET: 116-13035 MATERIAL: POLYCARBONATE FINISH: CLEAR		DATE: 24 JAN 02 BY: GABRIEL CHECKED BY: DELPHIAS TITLE: STRANDED WIRE, CATEGORY 6 SPECIFICATION SHEET: 116-13035 MATERIAL: POLYCARBONATE FINISH: CLEAR	
KIT, 8 POSITION, MODULAR PLUG, STRANDED WIRE, CATEGORY 6			STATE CASE CODE (DRAWING NO): 00779 ©-1479184 CUSTOMER DRAWING: 8:1		