

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LWR	DESCRIPTION	DATE	BY
HM	00			
	C	REV ECO-08-020668	26AUG08	GC BM

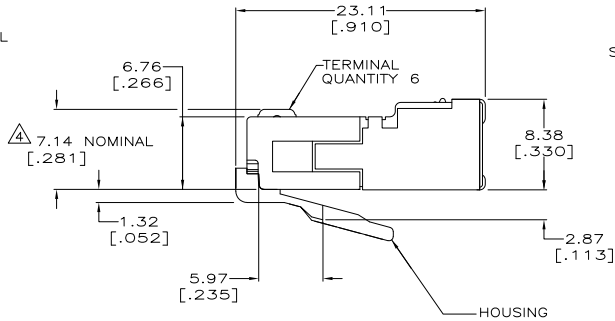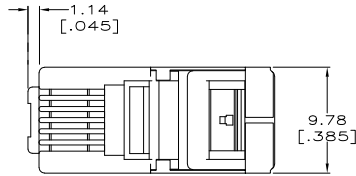

DETAIL A
 LATCH POSITION AFTER CRIMPING
 SCALE 10:1

- △ MATERIAL: HOUSING - POLYCARBONATE, CLEAR.
 TERMINAL - 0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27µm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54µm[.000100] THICK NICKEL UNDERPLATE.
 SHIELD - 0.25[.010] THICK COPPER ALLOY, SATIN NICKEL PLATED.
- 2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 3. PLUG WILL ACCEPT 0.74-0.99[.029-.039] DIAMETER SOLID WIRE, 26 OR 28 AWG, WITH A .180 DIAMETER MAXIMUM JACKET.
- △ TERMINATED DIMENSION: 6.15[.242] MAXIMUM.
- △ LATCH SHALL BE IN POSITION SHOWN IN DETAIL "A" AFTER CRIMPING.
- △ 500 PIECES PER PACKAGE.
- △ 100 PIECES PER PACKAGE.

LEAD FREE

△	5-1368336-3
△	5-1368336-2
PACKAGED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DW 14 MAR 2003		Tyco Electronics Corporation	
DL DELUMINO		14 MAR 2003		Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		APD 14 MAR 2003		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		E.C. LAUBER		MODULAR PLUG ASSEMBLY,	
0 PLC ±		PRODUCT SPEC		6 POSITION, LONG BODY, SHIELDED,	
1 PLC ±		APPLICATION SPEC		ROUND CABLE, SOLID WIRE	
2 PLC ± 0.13[.005]		WEIGHT		RESTRICTED TO	
3 PLC ±		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV C	
4 PLC ±		FINISH			
ANGLES ±		SIZE CAGE CODE DRAWING NO		A2 00779 C-1368336	

AMP 1471-9 REV 31MAR2000

1368336

A