


REV	DATE	DESCRIPTION	BY	CHK	APP
AA	28				
B		ADD: 3/1; NPR C98-62 & EC 0502-0208-88-27-98	GG	SH	
C		REV-ECD-06-017000	17.JAL/66	LH	SH

- △ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- △ MATERIAL: WIRING BLOCK ASSEMBLY AND CONNECTOR BLOCK- POLYCARBONATE MOLDING COMPOUND, FLAME RETARDANT, IVORY. DESIGNATION STRIP- RIGID PVC, CLEAR. TERMINALS- PHOSPHOR BRONZE PLATED WITH 3.81µm [0.000150] MINIMUM BRIGHT MATTE-TIN OVER 1.27µm [0.000050] MINIMUM NICKEL UNDERPLATE.
- △ WHITE, DESIGNATION STRIP LABEL NOT SHOWN, QUANTITY 2.
- 4. PACKAGE ONE KIT PER POLYBAG.
- 5. LACING STRIPS MARKED BLACK EVERY FIFTH PAIR.
- △ SEE RESTRICTED CUSTOMER DRAWING 3-569440-1.

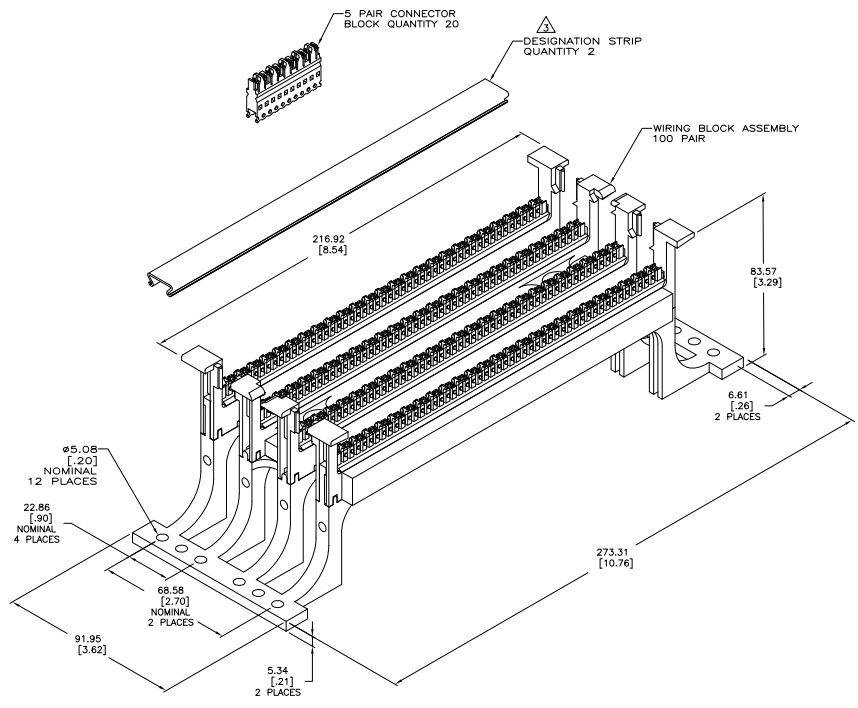

△
569440-1
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	BY	CHK	APP
		AA	28			
DRAWING NO. (INCHES)		CUSTOMER LABEL		DATE		
110 CROSS CONNECT KIT, 100 PAIR, WITH LEGS, 5 PAIR CONNECTOR BLOCK		11-21-88		11-21-88		
DRAWING SPEC		REV		DATE		
A1		00779		G=569440		
CUSTOMER DRAWING		SCALE		SHEET		
		1:1		1 of 1		