


REV	DATE	DESCRIPTION	BY	CHK	APP
B		ADD 2/1, NFR C98-62 & EC 0502-0208-98 4-30-98	GG	SH	
C		REV-ECD-06-06535	20MR06	LH	SH
D		REV-ECD-06-07000	17.XAL36	LH	SH

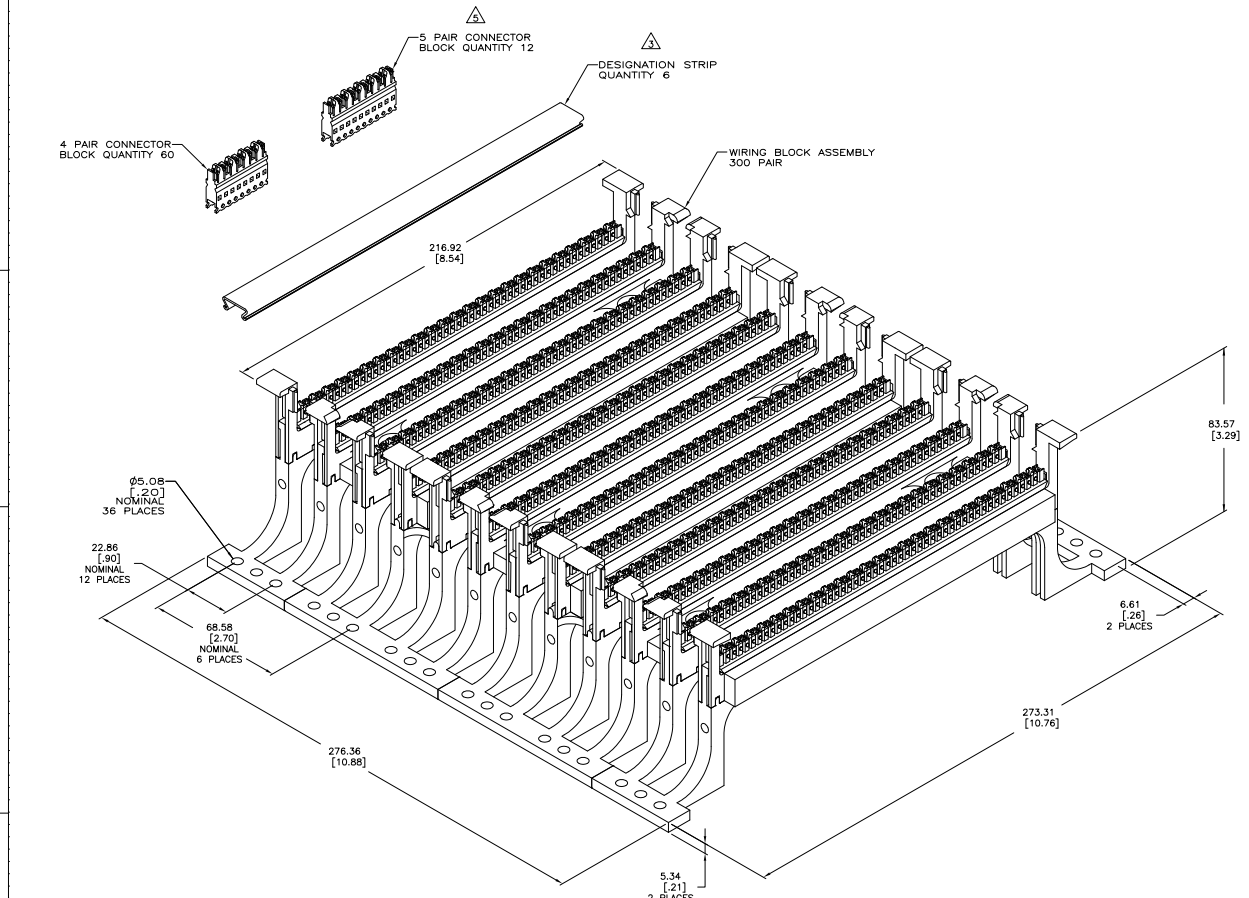

- REVISIONS**
- | REV | DATE | DESCRIPTION | BY | CHK | APP |
|-----|------|---|----------|-----|-----|
| B | | ADD 2/1, NFR C98-62 & EC 0502-0208-98 4-30-98 | GG | SH | |
| C | | REV-ECD-06-06535 | 20MR06 | LH | SH |
| D | | REV-ECD-06-07000 | 17.XAL36 | LH | SH |
- △ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
 - △ MATERIAL- WIRING BLOCK ASSEMBLY AND CONNECTOR BLOCK- POLYCARBONATE MOLDING COMPOUND, FLAME RETARDANT, IVORY.
DESIGNATION STRIP- RIGID PVC, CLEAR.
TERMINALS- PHOSPHOR BRONZE PLATED WITH 3.81µm [.000150] MINIMUM MATTE-TIN OVER 1.27mm [.050000] MINIMUM NICKEL UNDERPLATE.
 - △ WHITE, DESIGNATION STRIP LABEL NOT SHOWN, QUANTITY 6.
 - 4. PACKAGE ONE KIT PER POLYBAG.
 - △ THE ODD CONNECTING BLOCK IS TYPICALLY LOCATED ON THE RIGHT END.
 - 6. LACING STRIPS MARKED BLACK EVERY FIFTH PAIR.
 - △ SEE RESTRICTED CUSTOMER DRAWING 3-569445-1.

569445-1
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: [signature]	DATE: 11-10-98	APPROVED BY: [signature]	DATE: 11-10-98
DRAWN BY: [signature]	DATE: 11-10-98	CHECKED BY: [signature]	DATE: 11-10-98

110 CROSS CONNECT KIT, 300 PAIR, WITH LEGS, 4 & 5 PAIR CONNECTOR BLOCK

100779G=569445

CUSTOMER DRAWING