


THIS DRAWING IS UNPUBLISHED. REPRODUCED FOR INFORMATION.
 © 2006 BY TYS ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
B	ADD:3/1, NFR C98-62 & EC 0502-0208-98 4-30-98		GG	SH	
C	REV-ECD-06-017000		17.AAL/6	LH	SH

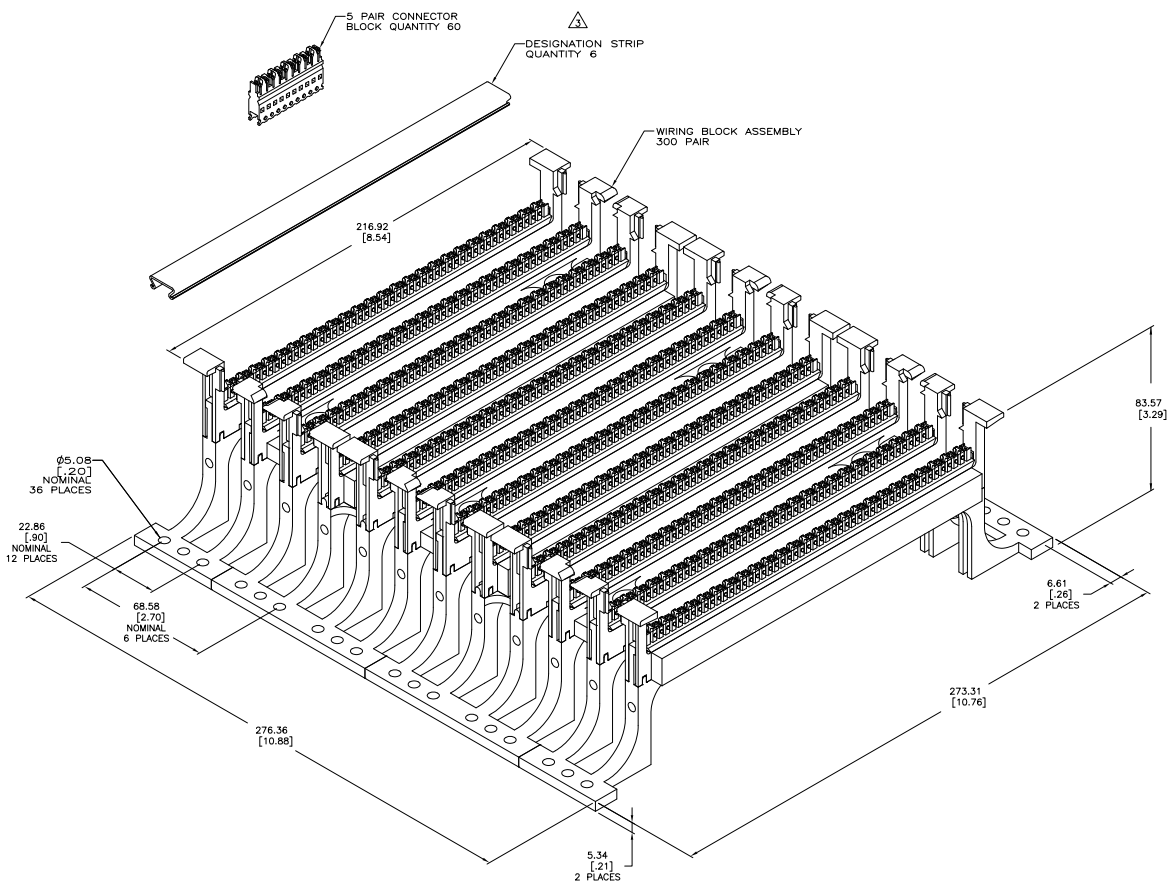

- △ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- △ MATERIAL- WIRING BLOCK ASSEMBLY AND CONNECTOR BLOCK- POLYCARBONATE MOLDING COMPOUND, FLAME RETARDANT, IVORY.
 DESIGNATION STRIP- RIGID PVC, CLEAR.
 TERMINALS- PHOSPHOR BRONZE PLATED WITH 3.81µm [.000150] MINIMUM MATTE-TIN OVER 1.27mm [.0500] MINIMUM NICKEL UNDERPLATE.
- △ WHITE, DESIGNATION STRIP LABEL NOT SHOWN, QUANTITY 6.
- 4. PACKAGE ONE KIT PER POLYBAG.
- 5. LACING STRIPS MARKED BLACK EVERY FIFTH PAIR.
- △ SEE RESTRICTED CUSTOMER DRAWING 3-569446-1.

569446-1
 PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. 1	DATE 11-19-98	BY SH	CHK SH	APP SH
DESIGNER: [Symbol]		DATE 11-19-98	BY SH	CHK SH	APP SH	
CHECKED: [Symbol]		DATE 11-19-98	BY SH	CHK SH	APP SH	
APPROVED: [Symbol]		DATE 11-19-98	BY SH	CHK SH	APP SH	
CUSTOMER DRAWING		SIZE A1	DATE 00779	DRAWING NO. C=569446	REWORKED TO	
		SCALE 1:1	SHEET 1	TOTAL 1	REV C	