

SFP+ PRESS FIT CAGE
(P/N: U77-1163-2010P
IF ORDERED SEPERATELY)

SFP+ PRESS FIT CAGE
(P/N: U77-A1639-X001
IF ORDERED SEPERATELY)

MATERIAL:
 CAGE: COPPER ALLOY.
 PLATING:
 PLATING OPTION 2: 2.54 μm [100 μ] NICKEL PLATING.
 PLATING OPTION 3: 2.54 - 7.62 μm [100 - 300 μ]
 MATTE TIN PLATING OVER 1.27 μm [50 μ] NICKEL.
 LIGHT PIPE: CLEAR POLYCARBONATE.
 LIGHT PIPE BRACKET: STAINLESS STEEL.
 PACKAGING: TRAY PACKAGING.
 TEMPERATURE RANGE: -40°C TO 85°C.

AMPHENOL PART NUMBER CONFIGURATION


U77-C1619-X001

CAGE PLATING: 2 = NICKEL 3 = MATTE TIN
 PACKAGING: 1 = TRAY PACKAGING

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PUPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE IN MILLIMETERS		APPROVALS		DATE	Amphenol Canada Corp.	
DECIMALS	ANGLES	DRAWN	H.SONG	JUL02/09	TITLE	
X.X ± 0.15	± 0.5°	DESIGNED			1X1 SFP+ CAGE, SPRING FINGER GASKET WITH LIGHT PIPE	
X.XX ± 0.10		CHECKED	J.SI	AUG06/09		
MATERIAL AND FINISH		QA APPD				
REF.		E APPD		Q/A	DWG. NO.	REV.
CODE IDENT. NO.	03554	DWG APPD		SCALE	P-U77-C1619-X001	B
				3:1	PROJECT	1 OF 3

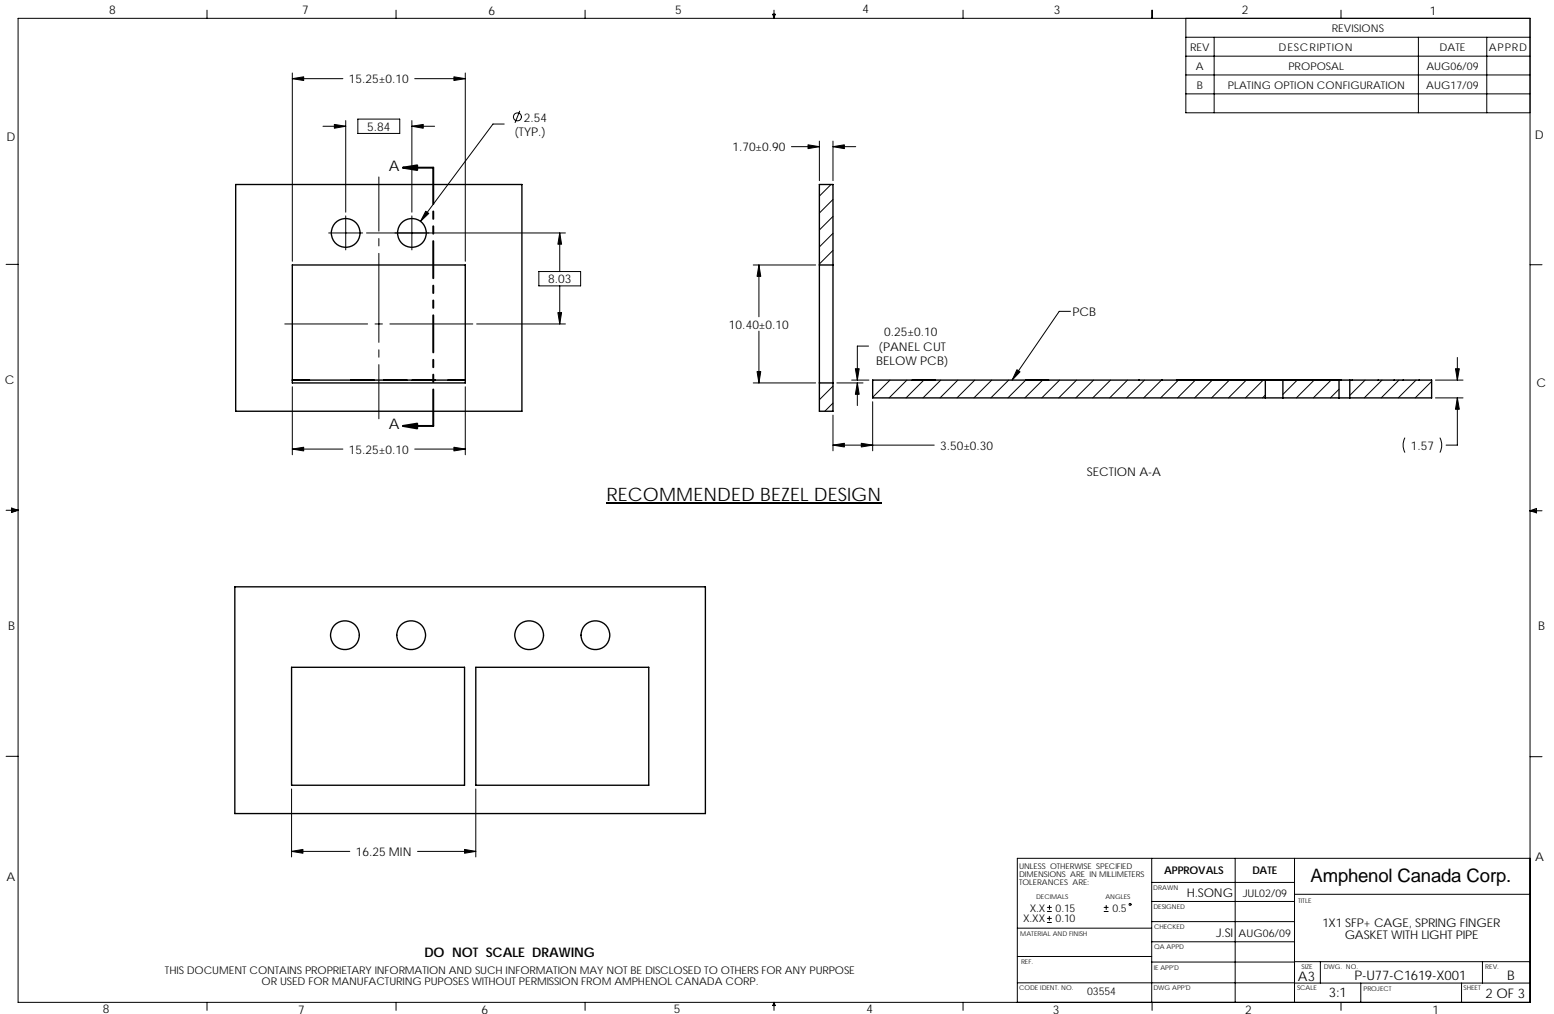

REVISIONS			
REV	DESCRIPTION	DATE	APPRD
A	PROPOSAL	AUG06/09	
B	PLATING OPTION CONFIGURATION	AUG17/09	

RECOMMENDED BEZEL DESIGN

SECTION A-A

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		APPROVALS		DATE		Amphenol Canada Corp.	
DECIMALS	ANGLES	DRAWN	H.SONG	JUL02/09		TITLE	
X.X ± 0.15	± 0.5°	DESIGNED				1X1 SFP+ CAGE, SPRING FINGER GASKET WITH LIGHT PIPE	
X.XX ± 0.10		CHECKED	J.SI	AUG06/09			
MATERIAL AND FINISH		QA APPD					
REF.	E APPD			REV	AWG. NO.	REV	
CODE IDENT. NO.	Q3554	DWG APPD		SCALE	3:1	PROJECT	P-U77-C1619-X001
						SHEET	2 OF 3

