THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
AA	28

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REV; EC 0210-0020-96	09JUL96	DS	NJ

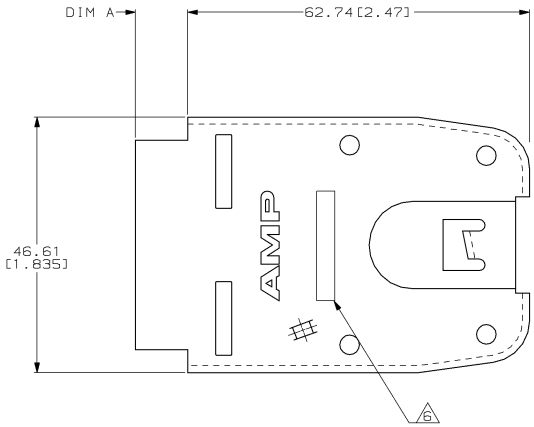

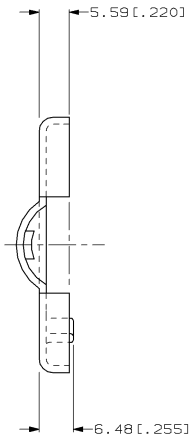

1. ALL DIMENSIONS ARE MAXIMUM.

2. STRAIN RELIEF TO BE ASSEMBLED WITH ø3.18[.125] X 12.7[.500] LONG SEMI-TUBULAR STEEL RIVETS FURNISHED BY CUSTOMER.

3. ASSEMBLY REQUIRES ONE PIECE OF EITHER:
   A) 555891-1 AND 555890-1 OR 555890-3
   OR
   B) 555891-2 AND 555890-2 OR 555890-4.

4. RECOMMEND ARMOUR CABLE TO ACCOMMODATE UP TO 8 INSULATED WIRES; 14.3[9/16] OR 12.7[1/2] INSIDE DIAMETER APPLIANCE FLEX METAL CONDUIT.

5. STRAIN RELIEF ASSEMBLY CAN BE USED WITH POWER CONNECTOR HOUSING 555930 AND POWER CONNECTOR BASE 555929 OR LINE CONNECTOR HOUSING 555892 AND LINE CONNECTOR COVER 555894.

6. STRAIN RELIEF IS MARKED AS FOLLOWS:
   555890-1 IS MARKED 90 1/2
   555890-2 IS MARKED 90 9/16
   555890-3 IS MARKED 90 1/2
   555890-4 IS MARKED 90 9/16

555890

DIM A	DESCRIPTION	PART NO.
0.64[.025]	14.3[9/16] CONDUIT	555890-4
0.64[.025]	12.7[1/2] CONDUIT	555890-3
9.91[.390]	14.3[9/16] CONDUIT	555890-2
9.91[.390]	12.7[1/2] CONDUIT	555890-1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN D. STRAUSSER 09JUL96
CHK N. JONES 09JUL96
APVD R. ROSSI 12JUL96
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

AMP
AMP Incorporated
Harrisburg, PA 17105-3608

NAME STRAIN RELIEF,FLEXIBLE CONDUIT,RIGHT

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-555890

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV E

AMP 1471-9 REV 09MAY94

09-JUL-96 08:42:24 amp33741 /home/amp33741/edmmod

Downloaded from Elcodis.com electronic components distributor