


LOC		DIST		REVISIONS			
AA		28		F	LN	DATE	APPD
				D	REV, EC 0210-0020-96	09JUL96	DS NJ

- ALL DIMENSIONS ARE MAXIMUM.
  - STRAIN RELIEF TO BE ASSEMBLED WITH  $\varnothing 3.18[.125]$  X  $12.7[.500]$  LONG SEMI-TUBULAR STEEL RIVETS FURNISHED BY CUSTOMER.
  - ASSEMBLY REQUIRES ONE PIECE OF EITHER:  
A) 555891-1 AND 555890-1 OR 555890-3 OR  
B) 555891-2 AND 555890-2 OR 555890-4.
  - RECOMMEND ARMOUR CABLE TO ACCOMMODATE UP TO 8 INSULATED WIRES,  $14.3[9/16]$  OR  $12.7[1/2]$  INSIDE DIAMETER APPLIANCE FLEX METAL CONDUIT.
  - STRAIN RELIEF ASSEMBLY CAN BE USED WITH POWER CONNECTOR HOUSING 555930 AND POWER CONNECTOR BASE 555929 OR LINE CONNECTOR HOUSING 555892 AND LINE CONNECTOR COVER 555894.
- △ 6 STRAIN RELIEF IS MARKED AS FOLLOWS:  
555891-1 IS MARKED 91 1/2  
555891-2 IS MARKED 91 9/16

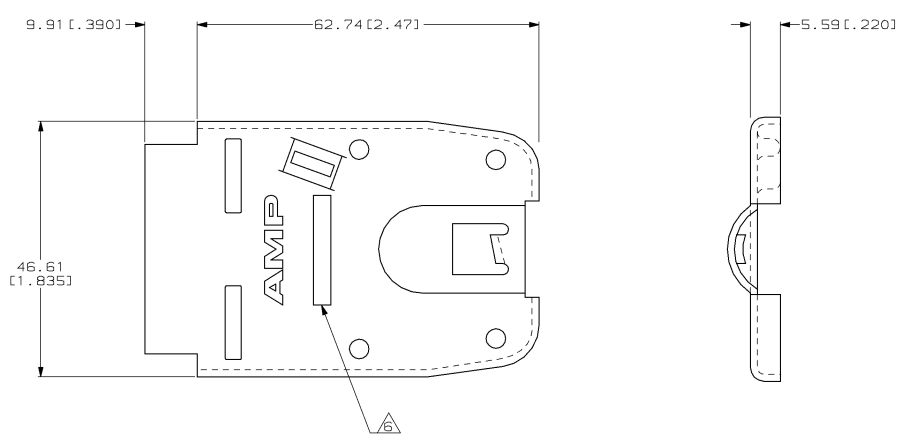

14.3[9/16] CONDUIT	555891-2
12.7[1/2] CONDUIT	555891-1
DESCRIPTION	PART NO.
<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608	
STRAIN RELIEF, FLEXIBLE CONDUIT, LEFT	
SIZE	CAGE CODE
A2 00779	C-555891
CUSTOMER DRAWING	SCALE 2:1 SHEET 1 OF 1 REV 0

DIMENSIONS mm (INCHES)		DIMENSIONS mm (INCHES)	
8 PL	±	8 PL	±
1 PL	±	1 PL	±
3 PL	±	3 PL	±
4 PL	±	4 PL	±
ANGLES	±	ANGLES	±
MATERIAL	-	FINISH	-