


DIN-Rail Receptacles

These modules are intended for use within cabinets and enclosures as 120 VAC outlets for power tools, lights, computers or test equipment for troubleshooting.


- Compact and easily snaps onto 35mm DIN-rail
- CSA, UL508A and cULus approved
- Available with ground fault current interrupt (GFCI) or standard simplex and duplex outlets
- Option for visual indication of power included with GFCI versions
- Enclosed versions feature NEMA rated enclosure with UL94 VO flammability rating



Schematic diagram



Schematic diagram

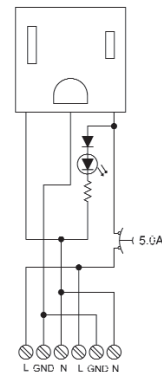



Rated data

Input voltage

Rated current	120Vac
	5A max via outlet
	10A via redundant terminals
Wire range	26 - 12 AWG (0.14 0 4.0mm ²)

Ordering data

TS32 / TS35 mounting ( / )

Dimensions

Width	35mm
Length	70mm
Height	55mm

Approvals

® LR-229352, © E252394

Rated current	120Vac
	5A max via outlet
	10A via redundant terminals
Wire range	26 - 12 AWG (0.14 0 4.0mm ²)

Type

Single outlet with circuit breaker **9915480001**
(supplemental protector with manual reset via push button)

Width	35mm
Length	70mm
Height	55mm

® LR-229352, © E252394

Trip Curves

