www.schurter.com/pg07

IEC Appliance Inlet C14 or C18, sandwich Mounting, PCB- or Solder Terminal







Snap-in mounting

Screw-on mounting

















- Panel Mount:

Snap-in or screw-on mounting on PCB, sandwich or rear-side

- Appliance Inlet, Pin temperature 70 °C, protection class I or II
- For PCB mounting

Approvals

- VDE Certificate Number: 40012767

- UL File Number: E96454 - CSA File Number: 38456



Other versions on request

- With solder terminals
- Variant with notch for V-Lock mating Cordsets

References

Weblinks

General Product Information, Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check, Accessories


Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.


Technical Data


Ratings IEC	10A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 3 kVAC between L-N > 3 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25°C to 70°C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140
Terminal	For PCB mounting; Ground terminal: angled to pin axis Solder terminal on request
Panel Thickness s	Sandwich/rear-side: 1.5/2/2.5/3 mm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Inlet	C14 acc. to IEC/EN 60320-1,
	UL 498, CSA C22.2 no. 42 (for cold
	conditions) pin-temperature 70 °C, 10A,
	Protection Class 1 or 2
	1 TOLEGUIOTI OIASS T OI Z


Dimensions - 32.9 mm

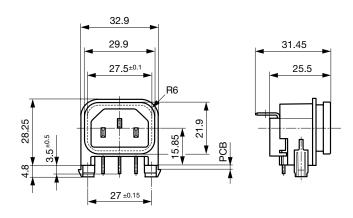







Snap-in mounting









with insulation cover

Screw on PCB mounting








Rear panel mounting

Sandwich mounting

Drilling diagrams

Drilling diagram



 $d1 = 6 \pm 0.05$ for Snap-in mounting $d1 = 3.6 \pm 0.05$ for screw-on mounting with self-tapping screws 3 mm (EJOT-PT), 2 screws enclosed

Variants

Protection Class	Panel mounting	Panel Thickness s [mm]	Ground terminal 4.8 x 0.8 mm	Cover	Order Number
1	Screw	1	angled to pin axis		GSP2.9103.11
1	Screw	1.5	angled to pin axis		GSP2.9103.13
1	Screw	2	angled to pin axis		GSP2.9103.14
1	Screw	2.5	angled to pin axis		GSP2.9103.15
1	Screw	3	angled to pin axis		GSP2.9103.16
1	Screw	1.5	angled to pin axis	•	GSP2.9113.13
1	Screw	2	angled to pin axis	•	GSP2.9113.14
1	Screw	2.5	angled to pin axis	•	GSP2.9113.15
1	Screw	3	angled to pin axis	•	GSP2.9113.16
1	Snap-in	1	angled to pin axis		GSP2.9203.11
1	Snap-in	1.2	angled to pin axis		GSP2.9203.12
1	Snap-in	1.5	angled to pin axis		GSP2.9203.13
1	Snap-in	2	angled to pin axis		GSP2.9203.14
1	Snap-in	2.5	angled to pin axis		GSP2.9203.15
1	Snap-in	2.5	angled to pin axis		GSP2.9213.15

Protection Class	Panel mounting	Panel Thickness s [mm]	Ground terminal 4.8 x 0.8 mm	Cover	Order Number
1	Snap-in	3	angled to pin axis		GSP2.9203.16
1	Snap-in	1.5	angled to pin axis	•	GSP2.9213.13
1	Snap-in	2	angled to pin axis	•	GSP2.9213.14
1	Snap-in	3	angled to pin axis	•	GSP2.9213.16
2	Screw	1.5	straight		GSP2.9100.13
2	Screw	3	straight		GSP2.9100.16
2	Screw	2	straight	•	GSP2.9110.14
2	Screw	2.5	straight	•	GSP2.9110.15
2	Snap-in	1.5	straight		GSP2.9200.13
2	Snap-in	2.5	straight		GSP2.9200.15
2	Snap-in	1.5	straight	•	GSP2.9210.13
2	Snap-in	2	straight	•	GSP2.9210.14
2	Snap-in	2.5	straight	•	GSP2.9210.15
2	Snap-in	3	straight	•	GSP2.9210.16

Additional version on request, e.g.: Ground terminal straigt or quick-connect terminal $6.3 \times 0.8 \text{ mm}$

Packaging unit

50 Pcs

Mating Outlets/Connectors

Category / Description

ConnectorOverview complete



IEC Connector C15, Rewireable, Straight	0101
IEC Connector C15A, Rewireable, Straight	0102
IEC Connector C15A, Rewireable, Straight	0102-G
IEC Connector C15A, Rewireable, Angled	0112
IEC Connector C13, Rewireable, Angled	4012
Connectorfurther types toGSP2	

Power CordOverview complete



Power Cord with IEC Connector C13, Angled	0311
Power Cord with IEC Connector C13, Angled	3011
Power Cord with IEC Connector C13, Angled	3012
Power Cord with IEC Connector C13, Angled	3013
Power Cord with IEC Connector C13	3020
Power Cordfurther types toGSP2	

Power Supply or Interconnection CordOverview complete



Divers Power Supply and Interconnection Cords 10 A	6000.0214
Divers Power Supply and Interconnection Cords 10 A	6000.0224
Divers Power Supply and Interconnection Cords 10 A	6003.0204
Divers Power Supply and Interconnection Cords 10 A	6003.0205
Divers Power Supply and Interconnection Cords 10 A	6003.0215
Power Supply or Interconnection Cordfurther types toGSP2	