


## Strip Block for Snap-in Mounting with 4 IEC Appliance Outlets F

**Description**

- Panel Mount:
- Snap-in version from front side
- 2 Functions:
- Module of 4 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

**Approvals**

- VDE Certificate Number: 40030337
- UL File Number: E96454
- CSA File Number: 56242

**Characteristics**

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

**Other versions on request**

- For protection class II

**References****Weblinks**

[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)


**Technical Data**

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in 1/1.2/1.5/2/2.5/3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
------------------	-----------------------------------------------------------------------------------------------------------------------------

## Dimensions

### Quadbloc 4752

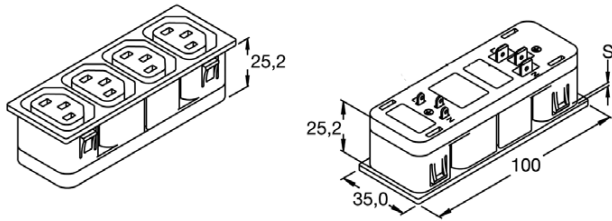

Panel cut-out 96,2 x 32,5 mm, corner radius max. 1 mm

## Variants


Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	100	4752.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	100	4752.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	100	4752.4200
2	Quick connect terminals 6.3 x 0.8 mm	100	4752.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	100	4752.6200
3	Quick connect terminals 6.3 x 0.8 mm	100	4752.7200
1	Solder terminals 4 x 0.8 mm	100	4752.3400
1.2	Solder terminals 4 x 0.8 mm	100	4752.8400
1.5	Solder terminals 4 x 0.8 mm	100	4752.4400
2	Solder terminals 4 x 0.8 mm	100	4752.5400
2.5	Solder terminals 4 x 0.8 mm	100	4752.6400
3	Solder terminals 4 x 0.8 mm	100	4752.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.7000

Please note, all quadblobs are available in protection-class II upon request.



Cord retaining clamp see accessories

**Packaging unit** 50 Pcs

## Accessories

		Description	
	<a href="#">Cord retaining kits</a> Cord retaining strain relief		
	Flat head, E		4700.0005
	Flat head, G		4700.0007

## Mating Inlets/Plugs

		Category / Description	
		<a href="#">Interconnection CordOverview complete</a>	
	Interconnection Cord with IEC Plug E, Angled		0607
	Interconnection Cord with IEC Plug E, Angled		0608
	Interconnection Cord with IEC Plug E, Straight		0609
	Interconnection Cord with IEC Plug G, Angled		607B
	Interconnection Cord with IEC Plug G, Angled		608B
	<a href="#">Interconnection Cordfurther types to4752</a>		...
		<a href="#">PlugOverview complete</a>	
	IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm		4732
	IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm		4733
	IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm		4735
	IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm		4736
	IEC Plug E, Cord Connector (Rewireable), Straight		9009
		<a href="#">Plugfurther types to4752</a>	...