
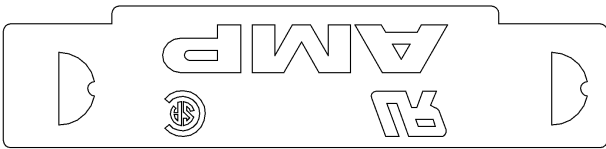
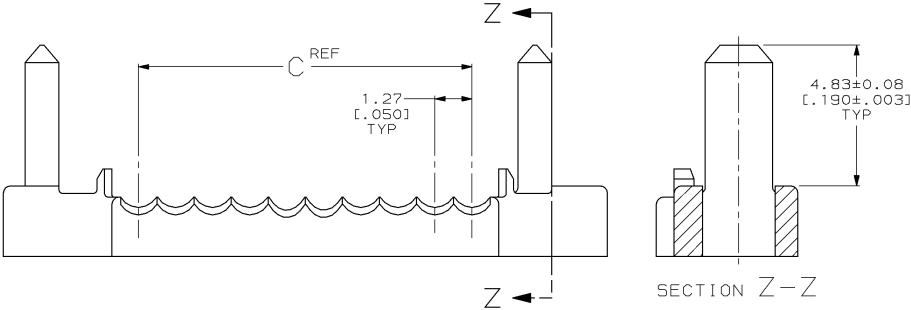


DRAWING MADE IN THIRD ANGLE PROJECTION  
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

REVISIONS				
LOC	DIST	P	F	REV
BD	95			0
				A
ZONE	LTR	DESCRIPTION	DATE	APPD
		RELEASED TO CUST	10/19/93	-
		REV PER EC 0020-829-95	10 MAY 95	RM

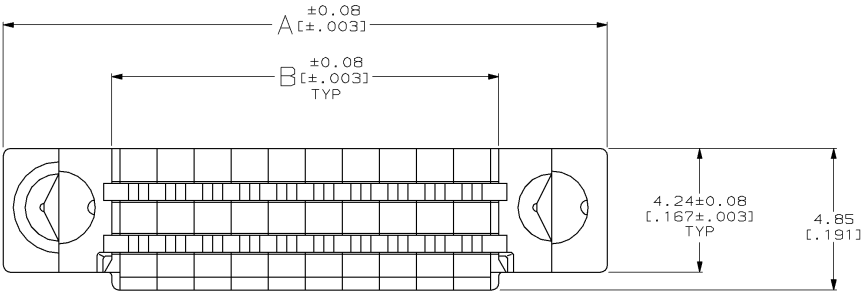

21.59 [0.850]	23.42 [0.922]	30.86 [1.215]	36	1-749108-1
15.24 [0.600]	17.07 [0.672]	24.51 [0.965]	26	1-749108-0
74.93 [2.950]	76.76 [3.022]	84.20 [3.315]	120	749108-9
62.23 [2.450]	64.06 [2.522]	71.50 [2.815]	100	749108-8
49.53 [1.950]	51.36 [2.022]	58.80 [2.315]	80	749108-7
41.91 [1.650]	43.74 [1.722]	51.18 [2.015]	68	749108-6
36.83 [1.450]	38.66 [1.522]	46.10 [1.815]	60	749108-5
30.48 [1.200]	32.31 [1.272]	39.75 [1.565]	50	749108-4
24.13 [0.950]	25.96 [1.022]	33.40 [1.315]	40	749108-3
16.51 [0.650]	18.34 [0.722]	25.78 [1.015]	28	749108-2
11.43 [0.450]	13.26 [0.522]	20.70 [0.815]	20	749108-1
C	B	A	NO OF POSN	PART NUMBER

- 1. POLYESTER, UL 94V-0 RATED, BLACK.
- 2. RECOMMENED WIRE: 28 OR 30 AWG SOLID OR 7 STRAIN, 0.74- 0.91 [0.029- .036] INSULATION DIAMETER. WIRE MUST BE APPROVED BY AMP INC.
- 3. TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ±0.13 [0.005] 3 PLC DEC ± ANGLES ± -	DR 10/19/93 C.OBERMAN CHK 10-19-93 R.STONE APPD 12-6-93 R.MIKLINSKI	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL	APPD 12-6-93 R.MIKLINSKI	NAME		
FINISH	PRODUCT SPEC 108-1228	TERMINATING COVER, AMPLIMITE™ .050 SERIES		
WEIGHT	APPLICATION SPEC 114-40029	SIZE C	CAGE CODE 00779	DRAWING NO C=749108
		SCALE 10:1		SHEET 1 OF 1

CUSTOMER DRAWING