


Strip Block for Snap-in Mounting with 4 IEC Appliance Outlets F and Space for 2 Extra Components



Description

- Panel Mount:
- Snap-in version from front side
- 4 Functions:
 - Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- VDE Certificate Number: 40030337
- UL File Number: E96454
- CSA File Number: 56242

Characteristics

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- For protection class II

References

Weblinks

[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

Technical Data


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N
	> 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in 1/1.2/1.5/2/2.5/3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
------------------	--

Dimensions

Quadbloc + Two 4758

Cut-out for 2 mm Snap-in Inlet

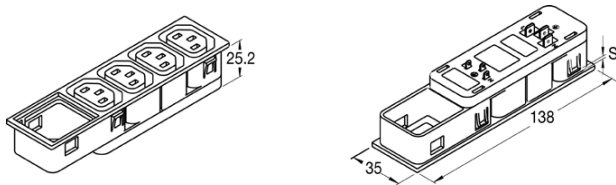

Panel cut-out 134 x 32,5 mm, corner radius max. 5 mm
 With power entry module, type 6200 or type 6220

Variants



Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	138	4758.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	138	4758.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	138	4758.4200
2	Quick connect terminals 6.3 x 0.8 mm	138	4758.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	138	4758.6200
3	Quick connect terminals 6.3 x 0.8 mm	138	4758.7200
1	Solder terminals 4 x 0.8 mm	138	4758.3400
1.2	Solder terminals 4 x 0.8 mm	138	4758.8400
1.5	Solder terminals 4 x 0.8 mm	138	4758.4400
2	Solder terminals 4 x 0.8 mm	138	4758.5400
2.5	Solder terminals 4 x 0.8 mm	138	4758.6400
3	Solder terminals 4 x 0.8 mm	138	4758.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.7000

Please note, all quadblobs are available in protection-class II upon request.


Cord retaining clamp see accessories

Packaging unit 50 Pcs



Required Accessory

	Description	
	6200 IEC Appliance Inlet C14 with Fuseholder 1-pole	
	IP 40, 5 x 20, 1-pole	6200.4120
	IP 40, 5 x 20, 1-pole	6200.4220
	IP 40, 5 x 20, 1-pole	6200.4320
	6220 IEC Appliance Inlet C14 with Fuseholder 2-pole	
	IP 40, 5 x 20, 2-pole	6220.5120
	IP 40, 5 x 20, 2-pole	6220.5220
	IP 40, 5 x 20, 2-pole	6220.5320

Accessories

	Cord retaining kits Cord retaining strain relief	
	Flat head, Z	0888.0021
	Flat head, E	4700.0005
	Flat head, G	4700.0007
	Flat head, H	4700.0008

Mating Inlets/Plugs

	Category / Description	
	Interconnection CordOverview complete	
	Interconnection Cord with IEC Plug E, Angled	0607
	Interconnection Cord with IEC Plug E, Angled	0608
	Interconnection Cord with IEC Plug E, Straight	0609
	Interconnection Cord with IEC Plug G, Angled	607B
	Interconnection Cord with IEC Plug G, Angled	608B
	Interconnection Cordfurther types to4758	...
	PlugOverview complete	
	IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
	IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4733
	IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
	IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
	IEC Plug E, Cord Connector (Rewireable), Straight	9009
	Plugfurther types to4758	...