

## AC Outlet Modules



These modules are intended for use within cabinets and enclosures as 120Vac outlets for power tools, lights, test equipment, computers, etc.

- Compact, easy to install
- CSA approved
- Four versions available:
  - single outlet
  - duplex outlet
  - duplex GFI, 15A
  - duplex GFI, 20A
- Single and duplex versions mount on 32mm and 35mm DIN rails
- GFI versions mount on 35mm DIN rail or can be direct mounted using an optional mounting kit

### United States

Weidmuller Inc.  
821 Southlake Blvd.  
Richmond, Virginia 23236  
Telephone: (800) 849-9343  
Facsimile: (804) 379-2593  
Email: [info@weidmuller.com](mailto:info@weidmuller.com)  
Website: [www.weidmuller.com](http://www.weidmuller.com)



### Canada

Weidmuller Ltd.  
10 Spy Court  
Markham, Ontario L3R 5H6  
Telephone: (800) 268-4080  
Facsimile: (905) 475-2798  
Email: [info1@weidmuller.ca](mailto:info1@weidmuller.ca)  
Website: [www.weidmuller.ca](http://www.weidmuller.ca)



### Mexico

Weidmuller, S.A. de C.V.  
5 Sur No. 4311  
Col. Huexotitla  
72534 Puebla, Pue. Mexico  
Telephone: (22) 37 2549  
Facsimile: (22) 43 1981  
Email: [weidmull@acnet.net](mailto:weidmull@acnet.net)

# AC Outlet Modules

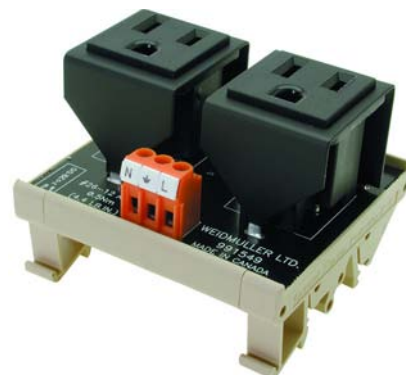

## Schematic diagram



## Rated data

### Input voltage

Rated current

120Vac

15A (CSA, UL)

120Vac

15A (CSA, UL)

## Ordering data

TS32 / TS35 mounting (□ / □)

Type

Cat.No.

Single outlet

**991548**

Type

Cat.No.

Duplex outlet

**991549**

## Dimensions

Width

Length

Height

30mm

70mm

48mm

75mm

70mm

48mm

Approvals

CSA, UL

CSA, UL


# AC Outlet Modules with Ground Fault Interrupter




Specifications	
<b>Voltage:</b>	120Vac
<b>Current:</b>	15A max. total feedthrough and via duplex
<b>Wire Size (AWG)</b>	26-14 AWG (0.14 - 2.5mm <sup>2</sup> )
<b>Terminations:</b>	top entry, tension clamp (LPZF)
<b>Configuration:</b>	1 x L, N, G input 2 x L, N, G GFI protected
<b>Mounting:</b>	TS35* optional direct mounting
<b>Approval:</b>	CSA, UL pending
<b>Ordering data:</b>	
<b>Catalog number:</b>	<b>7940000037</b>
<b>Optional direct mounting kit:</b>	7920560000 (includes 2 brackets & 4 screws).
<b>Dimensions:</b>	
<b>Width:</b>	130mm
<b>Length:</b>	95mm
<b>Height:</b>	67mm

<b>Voltage:</b>	120Vac
<b>Current:</b>	20A max. total 15A max. via duplex
<b>Wire Size (AWG)</b>	20-10AWG (0.5 - 6.0mm <sup>2</sup> )
<b>Terminations:</b>	side entry, screw clamp (LLP 6.35)
<b>Configuration:</b>	1 x L, N, G input 2 x L, N, G GFI protected
<b>Mounting:</b>	TS35* optional direct mounting
<b>Approval:</b>	CSA, UL pending
<b>Ordering data:</b>	
<b>Catalog number:</b>	<b>7940000036</b>
<b>Optional direct mounting kit:</b>	7920560000 (includes 2 brackets & 4 screws).
<b>Dimensions:</b>	
<b>Width:</b>	130mm
<b>Length:</b>	95mm
<b>Height:</b>	67mm


\*TS35 foot can be rotated 90 degrees to allow mounting in vertical or horizontal alignment on vertical or horizontal DIN rails. TS35 foot is removed when direct mounting kit is installed.

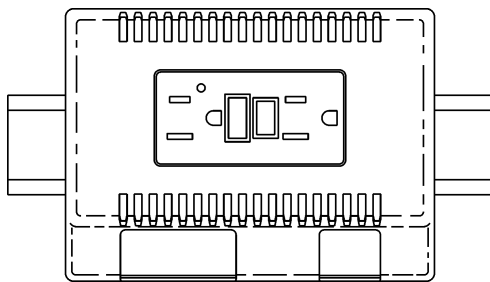

Standard mounting  
35mm DIN rail

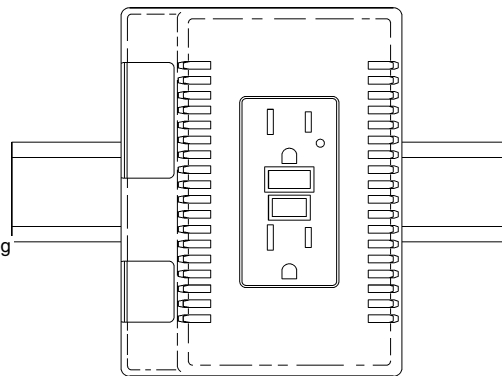

35mm DIN rail mounting  
foot rotated 90°

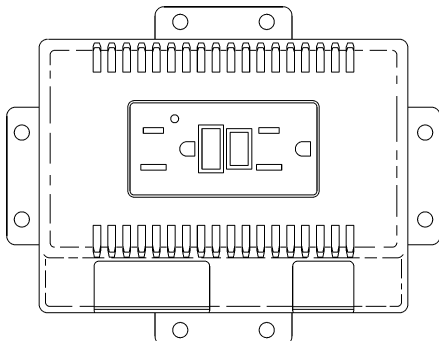

Locations for optional  
direct mount brackets (2  
required) 35mm DIN  
rail foot is removed and  
replaced by bracket kit  
7920560000.

## AC Outlet Modules with Ground Fault Interrupter

Application Note: Using the duplex GFI module to protect the AC outlets of Proport™ modules.

