

NUMBER C-179608
METRIC
三角度図 (3-View Projection)


PRINT DIST.
DIMENSIONS IN MM. DO NOT SCALE PRINT

2-179608-4 : 本 ☑


2-179608-4 : AS SHOWN

注記
1. 適用コネクタ型番 : X-173977-X (リセ)


NOTE
1. CONNECTOR P/N : X-173977-X(REC)






26P, 20P



28P, 22P, 16P

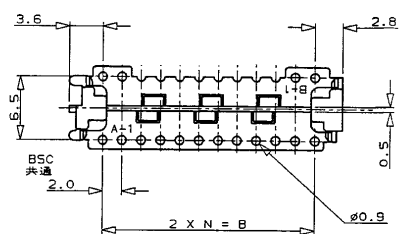

30P, 24P, 18P

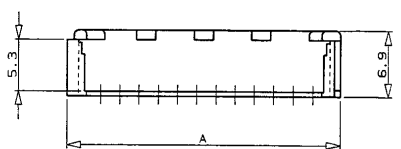

34.3	28.0	14	30	3-179608-0
32.3	26.0	13	28	2- -8
30.3	24.0	12	26	2- -6
28.3	22.0	11	24	2- -4
26.3	20.0	10	22	2- -2
24.3	18.0	9	20	2- -0
22.3	16.0	8	18	1- -8
20.3	14.0	7	16	1-179608-6

Copyright ©1990 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright ©1990 AMP (Japan), LTD. ALL RIGHTS RESERVED.		AMP カワシキ・エレクトロニクス株式会社 Kawasaki, Japan	
指定電線範囲 (WIRE RANGE) 単位: mm (ANG-#)		指定外径 (INSULATION DIA.) 単位: mm (φ)		名称 (NAME) CT ダブルロコネクタ用ホルダ (タイプ: CT MT 用)	
材料 (MATERIAL) 66ナイロン樹脂		色 (COLOR) 自然色		HOLDER FOR CT DOUBLE ROW CONN. (TYPE: CT MT TYPE)	
A	REVISED FJ00-4832-94 H.S.T.F. 7/26 '96	DR.	T. FURUYA 5/17 '96	DE.	T. FURUYA 5/17 '96
O	RELEASED FJ00-0588-94 T.F.S.K. 5/18 '94	CHK.	S. KUBOUCHI 5/17 '96	APP.	S. Kubouchi 7/4 '96
LTR 変更 (REVISION RECORD) DR CHK DATE		一般公差 (GENERAL TOLERANCE) 10μm ±0.2, 30μm ±0.25, 100μm ±0.3		SIZE	LOC
				B	J
				図番 (SCALE) 1:1	
				REV.	A
				SHEET 1 OF 1	

(CUSTOMER DRAWING) 参考 ☑ 面