


- ⚠ SHEET METAL SCREWS NOT SUPPLIED.
- ⚠ TWO REQUIRED PER CONNECTOR.
- ⚠ MAX WIRE BUNDLE WITHOUT INSERT IS 8 AT .190 DIA. AND MIN WIRE BUNDLE WITH INSERT IS 8 AT .040 DIA.
- 4 DETACHABLE INSERT MAY SEPARATE FROM STRAIN RELIEF BODY DURING SHIPPING.
- ⚠ STYLE II DOES NOT INCLUDE INSERT.

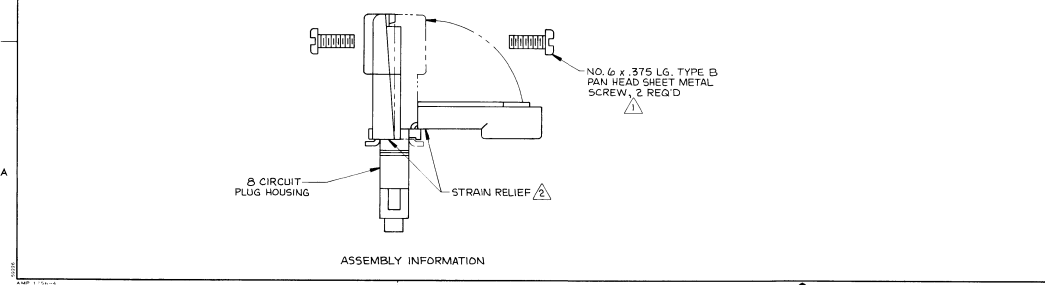

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.		CONTRACT NO.		AMP INCORPORATED Harrisburg, Pa. 17105	
TOLERANCES ON: DECIMALS - .015 ANGLES - 1°		DATE 9-28-87		NAME STRAIN RELIEF AND INSERT, 8 CIRCUIT, UNIVERSAL MATE-N-LOK™	
MATERIAL NYLON, UL 94 V-0		DRAWING NO. 643314		PART NO. 643314-1	
OTHER APP'D		SIZE D		SCALE 2:1	
		FSCM NO. 00779		SHEET 1 OF 1	