


1:1

LOC	DISP	REV	DATE	BY	CHKD	APPROV
A1	-	1				
PROJ	1534222	C1	POS 1 COVER: REV B WAS A, RADIUS NEW	22JUL2002	GF	BL
		C2	NOTE 3 ADDED	31MAR2004	FS	BL

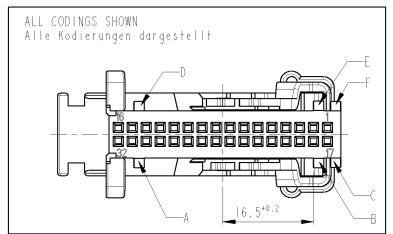

- NOTES
- LEVER ASSEMBLED IN PRE-LOCKED POSITION. LEVER MUST BE LOCKED BEHIND THE DIMPLE.
 - USED WITH 1420000, 1420001
 - ASSIGNMENT OF CAVITIES: MAXIMUM 25% OF CONTACT CAVITIES ASSIGNED WITH CONTACTS WITH A CABLE CROSS SECTION OF 0.5mm². UNIFORMLY DISTRIBUTED OVER THE HOUSING. LARGER CABLE CROSS SECTION ARE NOT PERMISSIBLE

- Bemerkungen
- Hebel in Vorraststellung montiert. Hebel muss hinter der Verriegelungsnase verrastet sein.
 - Benutzt mit 1420000, 1420001
 - Kammerbestückung: Maximal 25% der Kontaktkammern bestückt mit Kontakten mit Kabelquerschnitt 0,5mm², gleichmäßig verteilt über das Gehäuse ist zulässig. Größere Kabelquerschnitte sind nicht zulässig.

REV	TYCO PART-NO.	REV.	MATERIAL	COLOUR FARBE	RAL	CODING	DESCRIPTION	QTY.	ITEM NO.	
1534222-2	C	964826-1	E	PBT-GF	violett/ VIOLET	4006	C, D	LEVER / Hebel, HSG., 2X16 POSN.	1	2
1534223-2	B	964826-1	E	PBT-GF	blau/ BLUE	5012		COVER/ Abdeckkappe, HSG., 2X16 POSN	1	1
1534223-1	C	964826-1	E	PBT-GF	violett/ VIOLET	4006	A, F	LEVER / Hebel, HSG., 2X16 POSN.	1	2
1534223-1	B	964826-1	E	PBT-GF	gruen/ GREEN	6018		COVER/ Abdeckkappe, HSG., 2X16 POSN	1	1
Tyco ASSY-No.	REV.	Tyco PART-NO.	REV.	MATERIAL	COLOUR FARBE	RAL	CODING	DESCRIPTION	QTY.	ITEM NO.

DWG: G. Fischer CHK: B. Kirisch DATE: 05JUL01 APPR:	Tyco Electronics AMP GmbH D - 44625 Besselexen
DIMENSIONS: MASS (IN METERS) (MM) DIMENSIONS: MASS (IN INCHES) (INCHES)	DIMENSIONS: MASS (IN METERS) (MM) DIMENSIONS: MASS (IN INCHES) (INCHES)
PRODUCT SPEC: 103-18924 APPLICATION SPEC: 114-18630	PRODUCT SPEC: 103-18924 APPLICATION SPEC: 114-18630
MATERIAL:	MATERIAL:
CUSTOMER DRAWING	/KUNDENZEICHNUNG