

4

3


2

1

NOTES:

- 1 BOOT :
HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED
POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE
- 2 FLAT CABLE SEAL :
MODIFIED THERMOPLASTIC SEALANT
- 3 CONNECTOR STRIP :
COPPER ALLOY COATED WITH Sn63/Pb37 PER ANSI J-STD-006
FLUX COATED PER ANSI J-STD-004
- 4 SOLDER RING :
Sn63/Pb37 SOLDER ALLOY PER ANSI J-STD-006
FLUX COATED PER ANSI J-STD-004
- 5 CONTACT SEAL :
MODIFIED THERMOPLASTIC SEALANT
- 6 PIN CONTACT :
MATERIAL: PHOSPHOR BRONZE UNS C51900 PER ASTM B103/103M
PLATING: TIN-LEAD PLATING PER ASTM-AMS-P-81728.
FLUX: FLUX COATED PER ANSI J-STD-004
- 7. THIS TERMINATION MAY BE USED TO CONNECT, BY SOLDERING,
A FLAT CABLE OR PRINTED CIRCUIT BOARD TO A RIGID
PRINTED CIRCUIT BOARD.
- 8. FOR INSTALLATION, REFER TO PROCEDURE RPIP-652-00-01
- 9. USEABLE CABLES: RAYCHEM TU-20-100-22B
TU-20-100-24B
- 10 THIS DIMENSION MAY BE VARIED FROM 0.90 INCH CALL OUT
DUE TO THE RECOVERY PROCESS OF THE BOOT DURING
MANUFACTURING. THIS DIMENSION SHOULD NOT EXCEED 0.950 INCH.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED AND REDRAWN PER ECN #T-20129	6/1/95	HAGMANN
C	PER ECO-07-029635	Dec/13/07	M.HIGGY

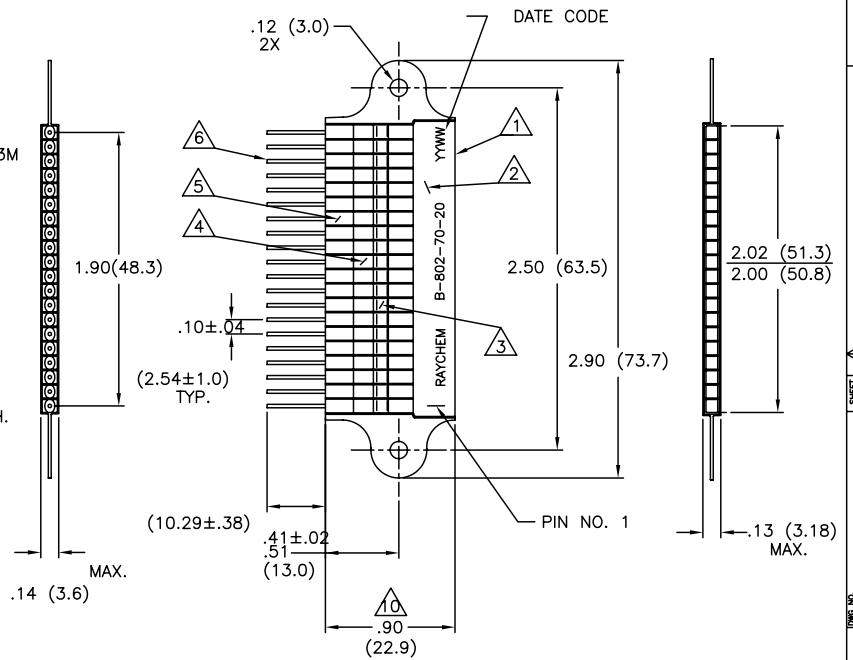

CUSTOMER DRAWING

© 2007 Tyco Electronics Corporation. All rights reserved.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ±.005 [0.1 mm] .XX ±.01 [0.5 mm] ANGLE ± 2' WEIGHT lbs. [4.2 g] MAX.	DRAWN JWELCH DATE 6/1/95	Raychem MTC <small>300 Constitution Drive North Fort, CA 94025 U.S.A.</small>	TITLE PCB TERMINATOR 20 CONTACTS
	CHECKED R.H. DATE 6/1/95		
	APPROVED RHAGMANN DATE 6/1/95		
	APPROVED DATE		
	CAD NAME B-802-70-20_C	SIZE [CODE IDENT. NO.] DWG. NO. C 06090 B-802-70-20	REV C
	THIRD ANGLE PROJECTION	DO NOT SCALE THIS DRAWING SCALE 2X SHEET 1 OF 1	

4

3

2

1