



DATE APPROVED BY: [Signature]	REVISED FOR FUNCTION:
BY: [Signature]	BY: [Signature]




REV	DATE	DESCRIPTION	BY	CHK	APP
0					
1		REVISED: EC 001C-0007-01	SHAWH	JA	TR
2		REVISED: EC 005D-0113-01	SHAWH	DLD	AMP
3		REVISED PER EC 0019-0020-02	SHAWH	BLO	TRW
4		REVISED PER EC 0015-0024-03	SHAWH	JB	CF

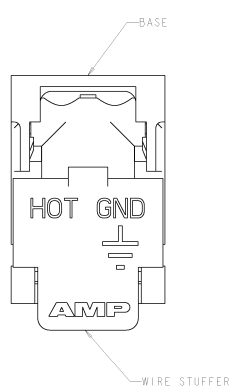

1339345-1 SHOWN

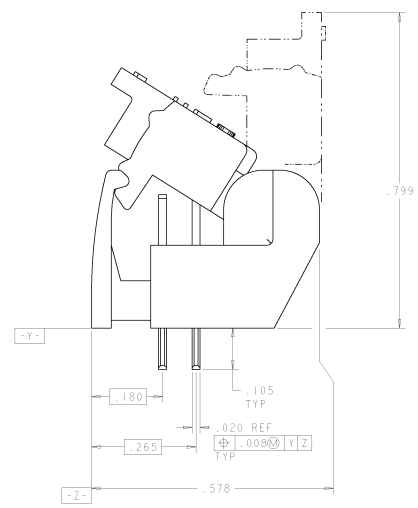

- △ MATERIAL: BASE - POLYESTER MOLDING COMPOUND, BLACK. WIRE STUFFER - POLYESTER MOLDING COMPOUND, BLACK. TERMINAL - COPPER ALLOY, PLATED WITH 3.81µm MINIMUM THICK TIN OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
- △ EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER 22-24 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM .060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
- 3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- △ LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER REQUIREMENTS.

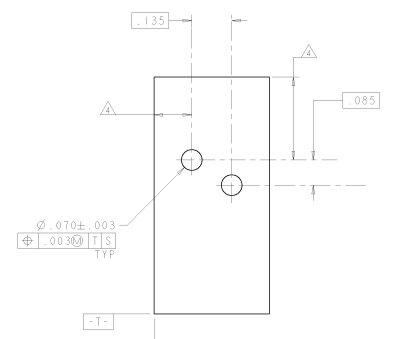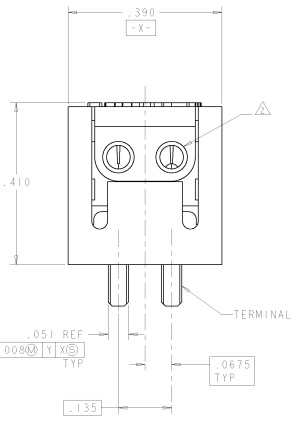

SUGGESTED PRINTED CIRCUIT BOARD MOUNTING DIMENSIONS VIEWED FROM SOLDER SIDE

BLANK	1339345-2
HOT GND	1339345-1
MARKINGS	PART NUMBER

AMP SINGLE PAIR, DOUBLE ENTRY, PIVOT II CONNECTOR CASE FILE: 00779 PART: 1339345		AMP CORPORATION Allentown, PA 18106-0001
MATERIAL: [Symbol] FINISH: [Symbol]	INCHES: [Symbol] DECIMALS: [Symbol] FRACTIONS: [Symbol] TOLERANCES: [Symbol]	REV: [Symbol] DATE: [Symbol] BY: [Symbol] CHECKED: [Symbol]