
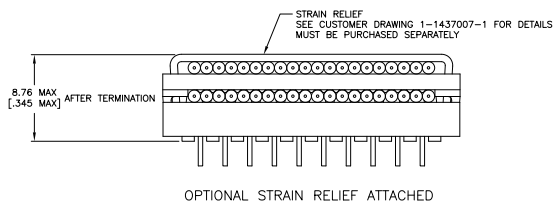

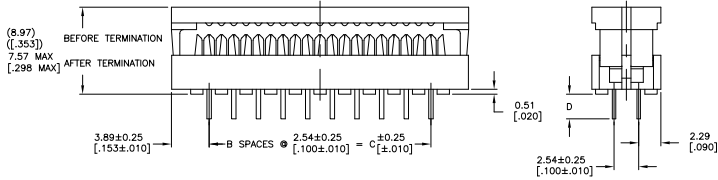


THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

ELECTRICAL PROPERTIES	
CURRENT RATING	1 AMP
INSULATION RESISTANCE	>5 × 10 <sup>8</sup> OHMS @ 500 VDC
DWV	>1000 VRMS AT SEA LEVEL
ENVIRONMENTAL PROPERTIES	
TEMPERATURE RATING	-55°C TO 125°C

REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01		REVISED PER EDD-11-004835			

- 20 POSITION ASSEMBLY SHOWN.
- HOUSING AND COVER: GLASS REINFORCED POLYESTER, UL94V-0 RATED, COLOR BLUE.
- CONTACTS: BERYLLIUM COPPER.
- CONTACTS: 0.00254[.000100] MIN TIN OVER 0.00127[.000050] MIN NICKEL.
- NOTCHES MAY OR MAY NOT BE PRESENT ALONG EDGES OF COVER OR HOUSING.

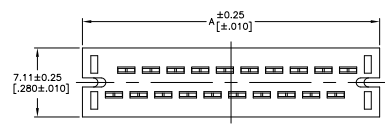

	3.96 [1.56]	5.08 [2.00]	2	12.85 [5.06]	6	622-0663LF	1-1658525-7
	2.54 [1.00]	78.74 [3.10]	31	86.51 [3.40]	64	622-6453LF	1-1658525-6
	2.54 [1.00]	73.66 [2.90]	29	81.43 [3.20]	60	622-6053LF	1-1658525-5
OBSOLETE	2.54 [1.00]	53.34 [2.10]	21	61.11 [2.40]	44	622-4453LF	1-1658525-4
	2.54 [1.00]	48.26 [1.90]	19	56.03 [2.20]	40	622-4053LF	1-1658525-3
	2.54 [1.00]	43.18 [1.70]	17	50.95 [2.00]	36	622-3653LF	1-1658525-2
OBSOLETE	2.54 [1.00]	35.56 [1.40]	14	43.33 [1.70]	30	622-3053LF	1-1658525-1
	2.54 [1.00]	27.94 [1.10]	11	35.71 [1.40]	24	622-2453LF	1-1658525-0
	2.54 [1.00]	22.86 [900]	9	30.63 [1.20]	20	622-2053LF	1658525-9
	2.54 [1.00]	17.78 [700]	7	25.55 [1.00]	16	622-1653LF	1658525-8
	2.54 [1.00]	15.24 [600]	6	23.01 [900]	14	622-1453LF	1658525-7
	2.54 [1.00]	10.16 [400]	4	17.93 [700]	10	622-1053LF	1658525-6
	2.54 [1.00]	7.62 [300]	3	15.39 [600]	8	622-0853LF	1658525-5
	2.54 [1.00]	5.08 [200]	2	12.85 [500]	6	622-0653LF	1658525-4
	2.54 [1.00]	40.64 [1.60]	16	48.41 [1.90]	34	622-3453LF	1658525-2
	2.54 [1.00]	30.48 [1.20]	12	38.25 [1.50]	26	622-2653LF	1658525-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS	DATE	BY	CHK	APP
1				

TE Connectivity  
 CONNECTOR, SLIMLINE PCB (STANDARD), LEAD FREE  
 SIZE: 5.1  
 CUSTOMER DRAWING