
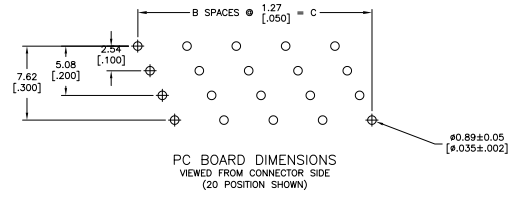

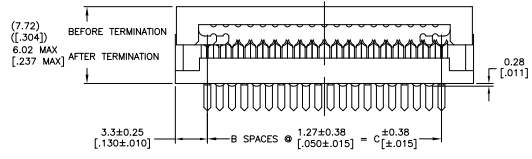


THIS DRAWING IS UNPUBLISHED  
 UNLESS INDICATED OTHERWISE  
 ALL RIGHTS RESERVED


REV	DATE	DESCRIPTION	BY	CHK	APP
00					
B1		REVISED PER EDD-11-004835			

ELECTRICAL PROPERTIES	
CURRENT RATING	1 AMP
INSULATION RESISTANCE	>1 x 10 <sup>9</sup> OHMS @ 500 VDC
DWV	>500 VRMS AT SEA LEVEL
ENVIRONMENTAL PROPERTIES	
TEMPERATURE RATING	-55°C TO 125°C

- 1 20 POSITION ASSEMBLY SHOWN.  
 △ HOUSING AND COVER: GLASS REINFORCED POLYESTER, UL94V-0 RATED, COLOR BLUE.  
 CONTACTS: BERYLLIUM COPPER.  
 △ CONTACTS: 0.0025[.000100] MIN TIN OVER 0.00127[.000050] MIN NICKEL.  
 △ COMPANY LOGO IN APPROXIMATE AREA SHOWN.

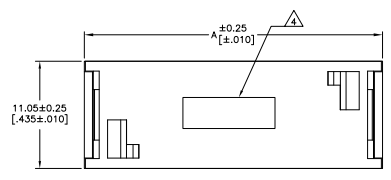

OBSOLETE	2.54	74.93	59	81.53	60	609-6003LF	3-6437006-6
	.100	[2.950]		[3.210]			
OBSOLETE	3.96	62.23	49	68.83	50	609-5043LF	3-6437006-2
	.156	[2.450]		[2.710]			
OBSOLETE	2.54	62.23	49	68.83	50	609-5003LF	3-6437006-1
	.100	[2.450]		[2.710]			
OBSOLETE	2.54	54.61	43	61.21	44	609-4403LF	2-6437006-9
	.100	[2.150]		[2.410]			
OBSOLETE	3.96	49.53	39	56.13	40	609-4043LF	2-6437006-7
	.156	[1.950]		[2.210]			
OBSOLETE	2.54	49.53	39	56.13	40	609-4003LF	2-6437006-6
	.100	[1.950]		[2.210]			
OBSOLETE	3.96	41.91	33	48.51	34	609-3443LF	2-6437006-3
	.156	[1.650]		[1.910]			
OBSOLETE	2.54	41.91	33	48.51	34	609-3403LF	2-6437006-2
	.100	[1.650]		[1.910]			
OBSOLETE	3.96	31.75	25	38.35	26	609-2643LF	2-6437006-0
	.156	[1.250]		[1.510]			
OBSOLETE	2.54	31.75	25	38.35	26	609-2603LF	1-6437006-8
	.100	[1.250]		[1.510]			
OBSOLETE	3.96	24.13	19	30.73	20	609-2043LF	1-6437006-5
	.156	[.950]		[1.210]			
OBSOLETE	2.54	24.13	19	30.73	20	609-2003LF	1-6437006-4
	.100	[.950]		[1.210]			
OBSOLETE	3.96	19.05	15	25.65	16	609-1643LF	1-6437006-2
	.156	[.750]		[1.010]			
OBSOLETE	2.54	19.05	15	25.65	16	609-1603LF	1-6437006-1
	.100	[.750]		[1.010]			
OBSOLETE	3.96	16.51	13	23.11	14	609-1443LF	6437006-9
	.156	[.650]		[.910]			
OBSOLETE	2.54	16.51	13	23.11	14	609-1403LF	6437006-8
	.100	[.650]		[.910]			
OBSOLETE	3.96	11.43	9	18.03	10	609-1043LF	6437006-6
	.156	[.450]		[.710]			
OBSOLETE	2.54	11.43	9	18.03	10	609-1003LF	6437006-5
	.100	[.450]		[.710]			

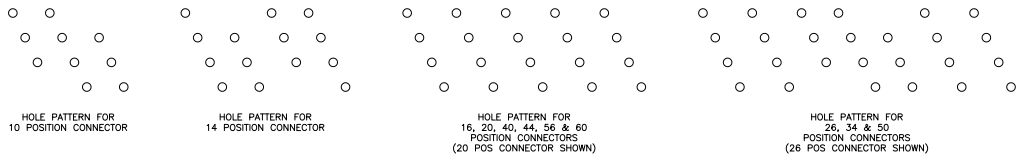

DIMENSIONS (mm INCHES)		TERMINAL LABELS	REFERENCE DESIGNATOR	TERMINAL IDENTIFICATION	TERMINAL USE
1	2	3	4	5	6
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36
37	38	39	40	41	42
43	44	45	46	47	48
49	50	51	52	53	54
55	56	57	58	59	60