THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED

UOC	DIST
CM	0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	AL1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

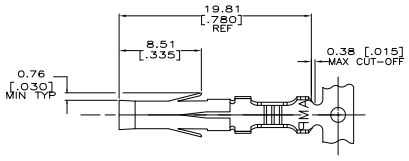

1. WIRE RANGE: 0.5–2mm² (20–14 AWG).
2. INSULATION RANGE: 3.56 [.140] MAX. DIA.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. 0.00076 [.000030] MIN GOLD STRIPE OVER 0.00127 [.000050] MIN NICKEL ON INSIDE OF SOCKET.







SECTION A–A
SCALE 10:1



SECTION B–B
SCALE 10:1



SECTION C–C
SCALE 10:1



SECTION D–D
SCALE 10:1

PRE–TIN	0.25 [.010] PHOS BRZ	350415–6
4	0.25 [.010] BRASS	350415–5
PRE–TIN	0.25 [.010] BRASS	350415–1
FINISH	MATERIAL	PART NO

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONS: mm [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.13 [.005]
4 PLC ± –
ANGLES ± 2.5°
MATERIAL SEE TABLE
FINISH SEE TABLE

DSN	K. WHITAKER 22NOV2005
CHK	D. COLEY 22NOV2005
APVD	D. COLEY 22NOV2005
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME .093 SOCKET
COMMERICAL PIN AND SOCKET
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-350415	–

CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV AL1

4605 (3/11)

Downloaded from Elcodis.com electronic components distributor