THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,-- -
© COPYRIGHT - By - ALL RIGHTS RESERVED.

UOM	DIST
CM	52

REVISIONS

*	LTR	DESCRIPTION	DATE	DWN	APVD
	L1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

1 WIRE RANGE: 0.12–0.9mm² (26–18 AWG).

2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.

3 DIMENSIONS IN BRACKETS ARE IN INCHES.

4 TIP PLATE WITH 0.00076–0.00091 [.000030–.000036] MIN GOLD IN THE LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

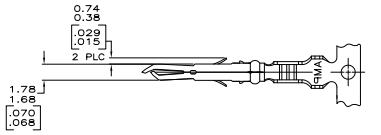







SECTION A–A
SCALE 10:1



SECTION B–B
SCALE 10:1



SECTION C–C
SCALE 10:1

4 GOLD PLATE	0.20 [.008] PHOS BRZ	350967-2
PRE-TIN	0.20 [.008] PHOS BRZ	350967-1
FINISH	MATERIAL	PART NO

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MILLIMETERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED: ± PLC ± -; ± PLC ± -; ± PLC ± -; ± PLC ± 0.13 [.005]; ± PLC ± -; ANGLES ± -

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DRN	K. SALMON	3-21-95
CHK	R. DRING	3-21-95
APVD	W. LONG	3-21-95

PRODUCT SPEC: —

APPLICATION SPEC: —

WEIGHT: —

TE Connectivity

NAME: MR PIN

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-350967	—

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV L1

4855 (3/11)

Downloaded from Elcodis.com electronic components distributor