
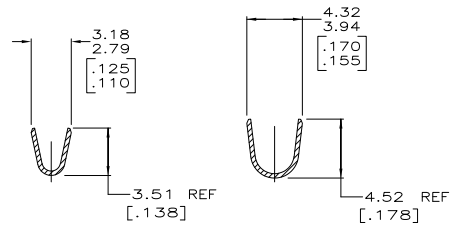
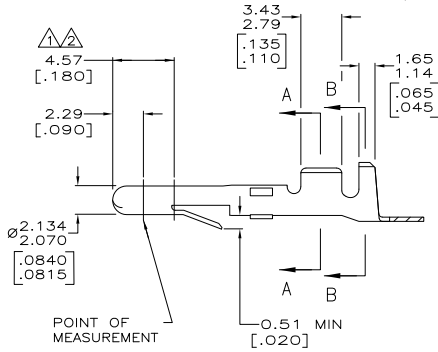


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	QST	REVISIONS				
CM	53	TR	DESCRIPTION	DATE	DRN	APPD
		AF1	REVISED PER ECO-11-004587	11MAR11	RK	HMR



METRIC

- 1. PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN TIP PLATE WITH 0.00076 [.000030] MIN GOLD IN THE MATING AREA.
- 2. PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN PLATE IN THE MATING AREA AND STRIPE THE INSIDE OF THE WIRE BARREL WITH 0.00076 [.000030] MIN GOLD.
- 3. WIRE RANGE: 0.5 - 2 mm<sup>2</sup> [20 - 14 AWG].
- 4. INSULATION RANGE: 3.30 [.130] MAX DIA.
- 5. APPLICATION TYPE: MINI.
- 6. DIMENSIONS IN BRACKETS ARE IN INCHES.

△	0.33 [.012] BRASS	61118-7
△	0.33 [.012] PH BRZ	61118-6
△	0.33 [.012] BRASS	61118-5
PRE-TIN	0.33 [.012] PH BRZ	61118-4
-	0.33 [.012] BRASS	61118-2
PRE-TIN	0.33 [.012] BRASS	61118-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		11-20-92	TE Connectivity			
BY	CHK	11-20-92	TE Connectivity			
DATE	DR	12-9-92	PIN, MATE-N-LOK™			
DIMENSIONS: mm(INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	SIZE	QAGE CODE	DRAWING NO	RESTRICTED TO
Ø .125	Ø .125	Ø .125	A2	00779	61118	—
Ø .13	Ø .13	Ø .13	SCALE	SHEET	1 of 1	REV
Ø .13	Ø .13	Ø .13	5:1	1	AF1	
Ø .13	Ø .13	Ø .13	CUSTOMER DRAWING			