THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
CM	53

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

1. WIRE RANGE: 2 – 6 mm^2 (14 – 10 AWG)
2. INSULATION RANGE: 2.54 – 4.57

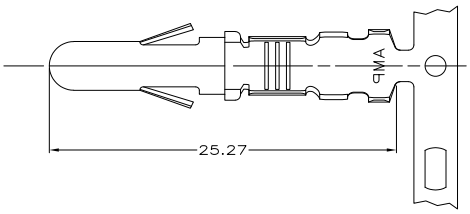

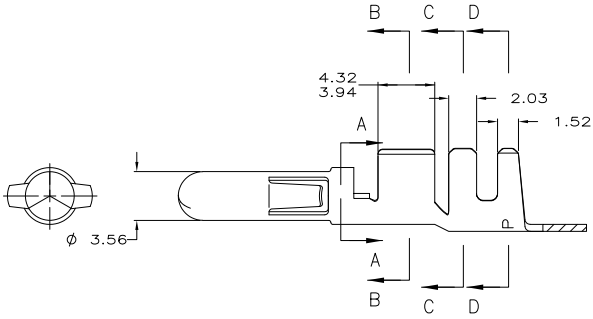

SECTION A–A



SECTION C–C



SECTION B–B



SECTION D–D

PRE TIN	0.36 PH BRZ	350201-2
PRE TIN	0.35 BRASS	350201-1
FINISH	MATERIAL	PART NUMBER

2.03	.080	4.32	.170	5.48	.216	–	–
1.52	.060	4.06	.160	5.46	.215	–	–
0.36	.014	3.94	.155	5.08	.200	–	–
0.35	.014	3.56	.140	4.57	.180	25.27	.995
0.13	.005	2.54	.100	4.45	.175	6.05	.238
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL SEE TABLE
FINISH SEE TABLE

DWN T. BECK 29OCT1998
CHK R. SWING 29OCT1998
APVD D. MARTIN 16NOV1998
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME PIN, .140 PIN & SOCKET CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-350201	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 of 1 | REV E1

1471-9 (3/11)

Downloaded from Elcodis.com electronic components distributor