

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LNK	DESCRIPTION	DATE	BY
J2		REVISED PER ECO-11-004917	11MAR11	RK HMR

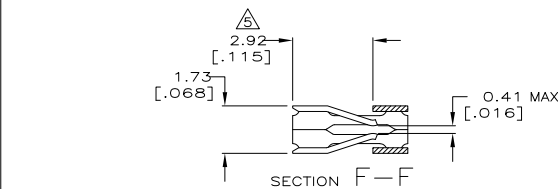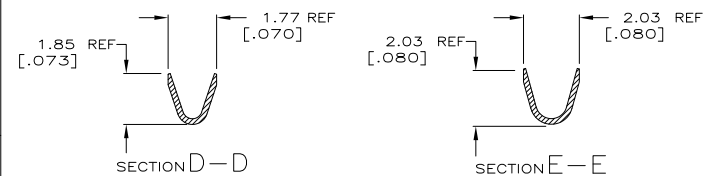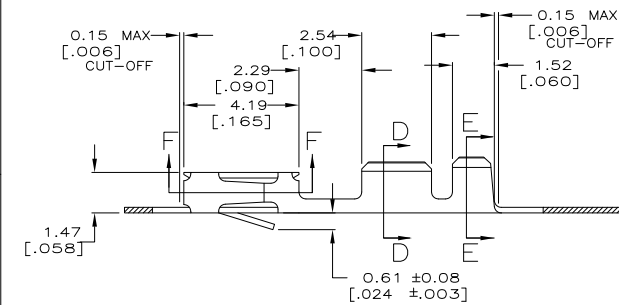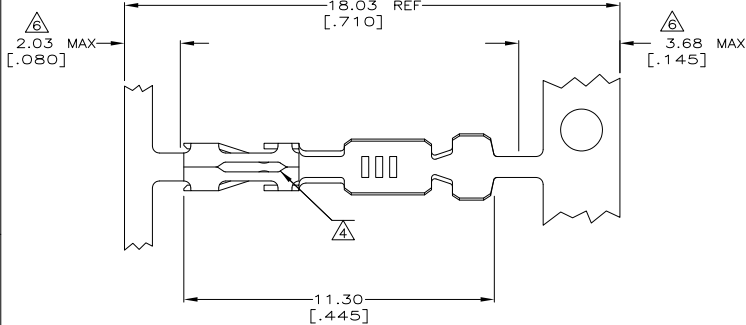

- △ REELED FOR MINI APPLICATOR.
 - △ FINISH: GOLD FLASH OVER 0.00127[.000050] NICKEL, 0.000381[.000015] GOLD IN CONTACT AREA.
 - △ FINISH: GOLD FLASH OVER 0.00127[.000050] NICKEL, 0.00076[.000030] GOLD IN CONTACT AREA.
 - △ CUT OUTS ON BOX AT MANUFACTURERS OPTION.
 - △ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS).
 - △ GOLD PLATING NOT REQUIRED IN THIS AREA.
7. WIRE RANGE #22-#26, INSULATION RANGE Ø.061 MAX.

LOOSE PC.	△	102548-6
LOOSE PC.	△	102548-5
LOOSE PC.	△	102548-3
LOOSE PC.	△	102548-1
DESCRIPTION	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	5-6-92
		CHK	5-20-92
DIMENSIONS: mm [INCHES]		S. SHUEY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J. GEFORDE	
0 PLG	±	NAME	
1 PLG	±	PRODUCT SPEC	
2 PLG	± 0.1% (.005)	APPLICATION SPEC	
3 PLG	±	WEIGHT	
4 PLG	±	SIZE	
ANGLES	±	CAGE CODE	
MATERIAL	BERYLLIUM COPPER	DRAWING NO	
FINISH	SEE TABLE	A2 00779 C=102548	
CUSTOMER DRAWING		RESTRICTED TO	
		SCALE 10:1 SHEET 1 of 1 REV J2	

1471-9 (3/11)

102548

A