THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-. -
© COPYRIGHT - By -. ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| CM | 52 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | B1 | REVISED PER ECO-11-004820 | 11MAR11 | RK | HMR |

1 WIRE RANGE: 0.12–0.9mm² (26–18 AWG).
2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.
3 DIMENSIONS IN BRACKETS ARE IN INCHES.
4 PLATE INTERNALLY WITH 0.00076 [.000030] MIN. GOLD IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.




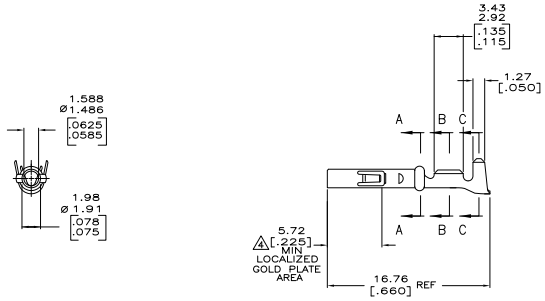





SECTION A–A
SCALE 10:1




SECTION B–B
SCALE 10:1




SECTION C–C
SCALE 10:1

| | | |
|---|---|---|
| GOLD STRIPE | 0.20 [.008] PHOS BRZ | 641300-2 |
| PRE-TIN | 0.20 [.008] PHOS BRZ | 641300-1 |

FINISH — MATERIAL — PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRN K. SALMON 3-21-95
CHK R. SWING 3-21-95
APVD W. LONG 3-21-95
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME RECEPTACLE, LOOSE PIECE, MR

DIMENSIONS: MM [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
2 PLC ± —
3 PLC ± —
4 PLC ± 0.13 [.005]
ANGLES ± —
FINISH —
MATERIAL SEE TABLE
SEE TABLE

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-641300 | RESTRICTED TO —

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV B1

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

4005 (3/11)

Downloaded from Elcodis.com electronic components distributor