



1 2 3 4

A

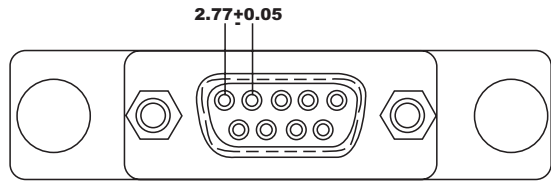


B

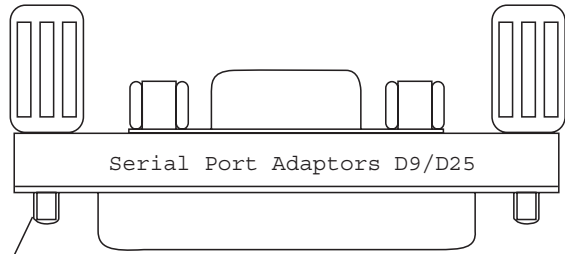

UNC #4-40

C

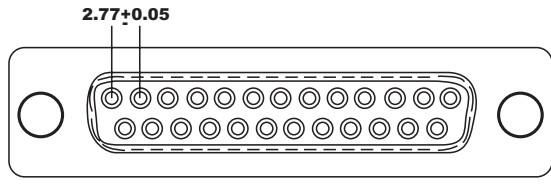

MA 001D (DB9F/25F Adaptor)
PIN Out: 09Female 25Female

1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

- 1.Label: Orange Color with White Character
- 2.One Side: Serial Port Adaptors D9/D25
- 3.The Other Side: MINI Adapter

Specification:

- 1.Insulator: PBT glass fiber reinforced UL 94VO
- 2.Contact: Brass
- 3.Contact Plating: Gold Plated over Nickel
- 4.Shell: Tin Plated Shell
- 5.Current Rating: 3 AMP
- 6.Dielectric Strength: 500V AC for one minute
- 7.Insulator Resistance: 500M min at 500 V DC
- 8.Temperature:-25°C +105°C

A

B

C

D

Description

Name :
AB469-R



THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1 2 3 4