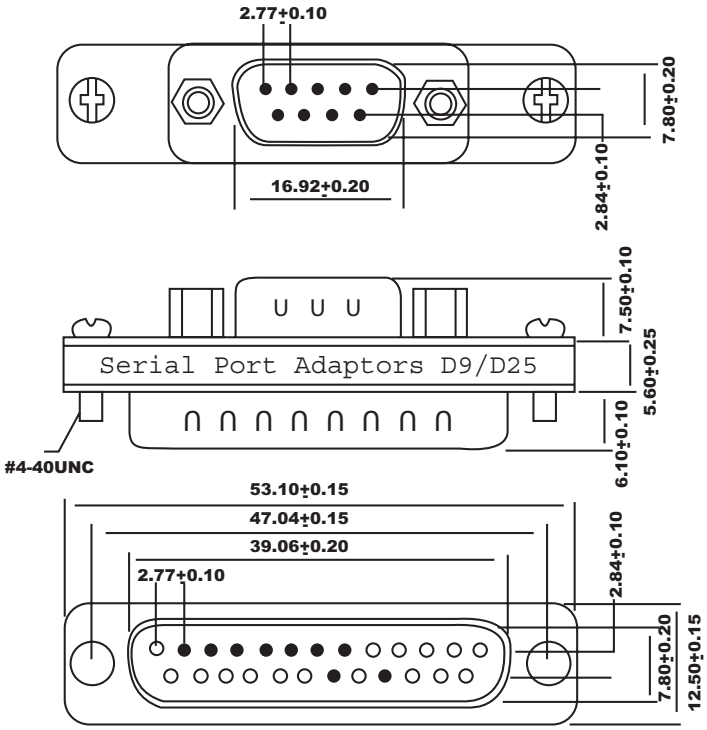

MA 001C (DB9M/25M Adaptor)

PIN OUT: 09Male — 25Male

09Male	25Male
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

1.Label: Orange color with White character
2.One Side: Serial Port Adaptors D9/D25
3.The Other Side: MINI Adaptor

Specification:

1.Insulator: PBT Glass Fiber reinforced UL 94VO
2.Contact:Brass
3.Contact Plating: Gold plated over Nickel
4.Shell: Tin Plated Shell
5.Current Rating: 3 AMP
6.Dielectric Strength: 500V AC for one minute
7.Insulator Resistance: 500M min at 500V DC
8.Temperature:-25°C ----+105°C

Description

Name:

AB467-R

ASSMANN Electronic Components

RoHS Compliant

THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

Downloaded from Elcodis.com electronic components distributor