


UNC #4-40 HEX Screw

UNC #4-40 HEX Nut

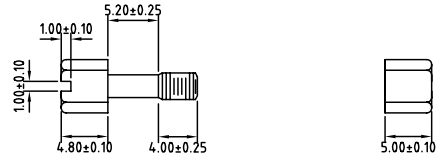

HD 15 F/F GENDER CHANGER PIN OUT

15P Female	15P Female
1	1
2	2
8	8
10	10
15	15
G	G

SPECIFICATIONS:

Material and Finish:

- Insulator: PBT, UL94 V-0 Rated
 - Contacts: Brass, Gold over Nickel Plated
 - Shell: Steel, Tin Plated
 - UNC #4-40 HEX Screw: Brass, Nickel Plated
 - UNC #4-40 HEX Nut: Brass, Nickel Plated
- Electrical:**
- Current Rating: 3 A Max.
 - Insulation Resistance: 1000 Mohms Min. @ 500 VDC
 - Dielectric Withstanding Voltage: 1000 VAC / 1 Minute
 - Operating Temperature: -55°C To +105°C



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. CONEC CORPORATION IS NOT RESPONSIBLE FOR ANY UNLAWFUL REPRODUCTION.	tolerance		finish		scale:		
	unless otherwise specified tolerance shall be as follow				material: SPECIFICATIONS		
	Decimal:	±0.25	Angles:		title: HD 15p Female/Female Gender Changer		
	Fractional:	±0.15			RoHS Compliant		
DO NOT ALTER CAD DRAWING BY HAND							drawing no.: AutoCAD 2005
year	date	name	draw.	date	name	DIN A3	
	2007		June 28	June 28	Vincent Ke	sheet 1/1	
			appd.	June 28	J. Chaudry		
			norm				
			d-old				
a	origin		CONEC		drawing no.:	16K1A1655	
rev.	description	date			name	part no.:	DAH1SSAAX01A