



Power Contacts

Male Solder

- ❖ 20A max current rating.
- ❖ Contacts are removable using extraction tool Z80-290 (see page 79).

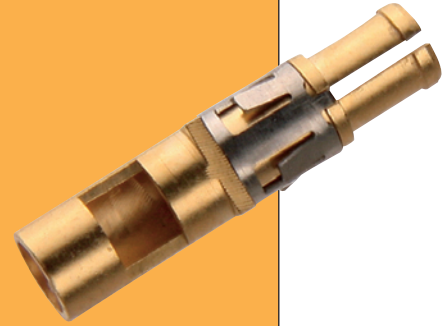


MALE SOLDER STRAIGHT

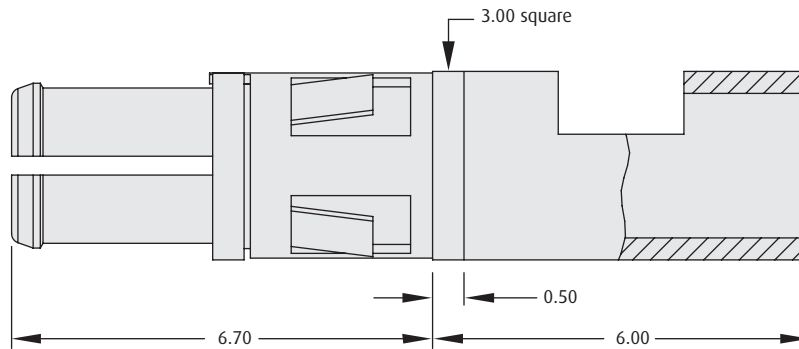

CABLE DIAMETER (MAX)	AWG	CURRENT RATING	ORDER CODE (LOOSE)	PART CODE (WITH ASSEMBLY)
2.3mm	12	20A	M80-335	335
2.0mm	14	15A	M80-336	336
1.5mm	16	10A	M80-337	337

WIRE STRIPPING DETAILS

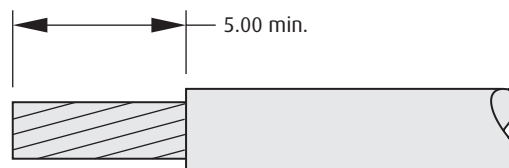

All dimensions in mm.

www.harwin.com

