


NUMBER C-172777  
 3-2 ANGLE PROJECTION  
 METRIC

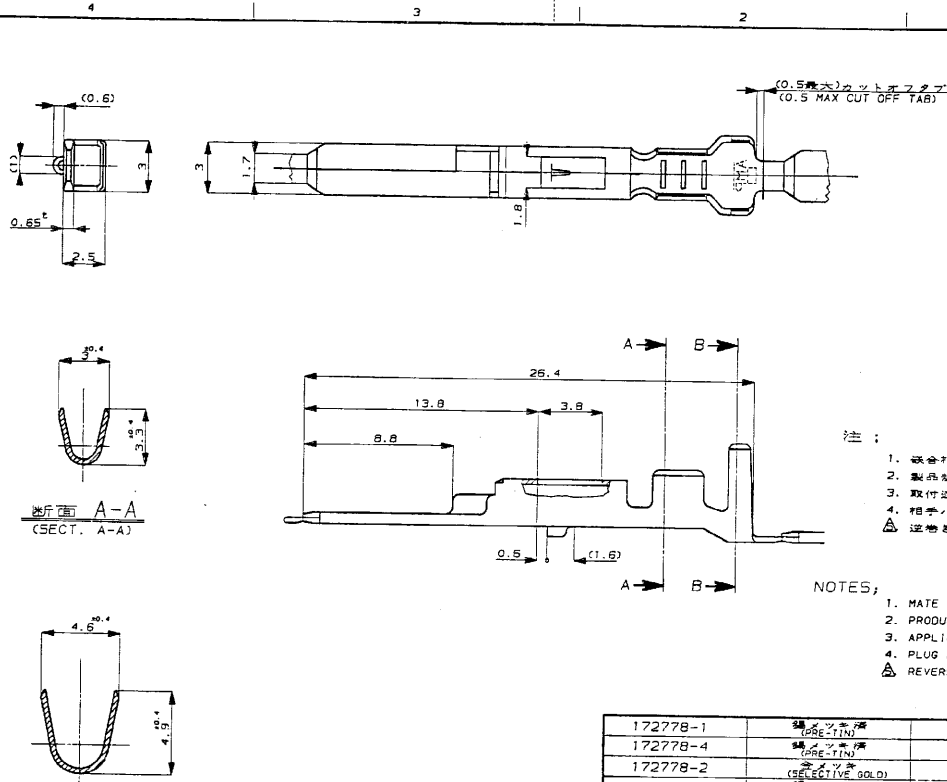

- 注:
1. 適合相乗りセパタクル型番 172773, 172774
  2. 製品規格 No. 108-5166
  3. 取付適用規格 114-5072
  4. 相手ハウジング型番 172518 他
- △ 逆巻きリール

- NOTES:
1. MATE TAB P/N 172773, 172774
  2. PRODUCT SPEC. No. 108-5166
  3. APPLICATION SPEC. No. 114-5072
  4. PLUG HSG P/N 172518 ETC.
- △ REVERSE REEL

172778-1	銅メッキ層 (PRE-TIN)	黄銅 (BRASS)	△1-172777-1	4
172778-4	銅メッキ層 (PRE-TIN)	黄銅 (PHOS BRG)	172777-4	3
172778-2	選択めっき (SELECTIVE GOLD)	黄銅 (BRASS)	172777-2	2
172778-1	銅メッキ層 (PRE-TIN)	黄銅 (BRASS)	172777-1	1

① BY AMP (JAPAN) LTD. ALL RIGHTS RESERVED. AND PRODUCTS COVERED BY PATENTS AND OR PATENTS PENDING		<b>AMP</b> AMP (JAPAN), LTD. Tokyo, Japan	
WIRE RANGE	INSULATION DIA	NAME	
0.5-2.27mm (AWG#20-14)	2.2-3.4 mm	タブコンタクト マルチインレーコネクタ (MIC) マーク II TAB MIC MK II	
MATERIAL	FINISH	GENERAL TOLERANCE	SIZE LOC NUMBER
J-1-629	SEE TABLE	0.1mm 10 ± 0.2 10mm 30 ± 0.25 30mm 100 ± 0.3	<b>B</b> J C-172777
C REDRAWN W/CHANGE	DR. A. S. J. 11/89	SCALE	REV. C SHEET 1 OF 1
LTR REVISION RECORD	DR. CHK. DATE	CUSTOMER DRAWING	

PRINT DIST  
 DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT  
 DEPTAUTO-E20501XJ, MICBU, CONTACTS, TAB1-C  
 REV. 10/83