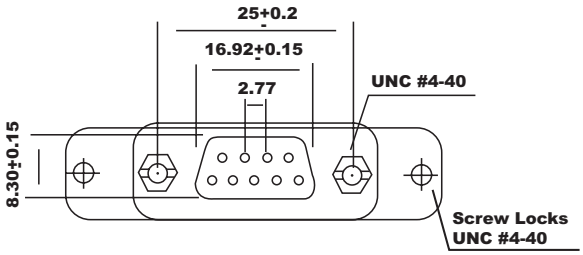


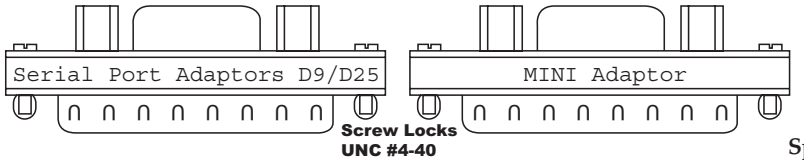


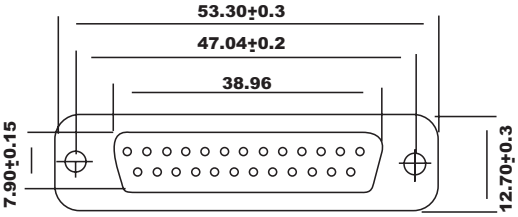


| DB9 PIN(F) | DB25PIN (M) |
|---|---|
| 1 | 8 |
| 2 | 3 |
| 3 | 2 |
| 4 | 20 |
| 5 | 7 |
| 6 | 6 |
| 7 | 4 |
| 8 | 5 |
| 9 | 22 |
| Shell | Shell |

**Specification:**

1.Voltage Rating: 300 VAC(rms)
2.Current Rating: 3 AMP CONTINUOUS
3.Dielectric Strength: 500 VAC
4.Contact Resistance: 10m OHM MAX 1 ADC
5.Insulation Resistance: 500M OHM min.
6.Mating Force Insertion Force: 1 oz-16 oz
Average: 150 gram
Extraction Force: 1 KG min.

**Materials:**

1.Housing: Thermoplastic P.B.T UL 94V-0, Black
2.Contact: Phosphor Bronze Gold, Selective Plated Over Nickel
3.Shell: Steel Tin Plated
4.Packing: See P-0039 Rev.C Packing Drawing + EAN Code
EAN Code: 4016032059967
5.Label: Orange Color with White Character

| Description |
|---|
| |
| Name: AB470-R |

ASSMANN Electronic Components

RoHS Compliant

THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

Downloaded from Elcodis.com electronic components distributor