





DESCRIPTION: 37-PIN MALE / MALE GENDER CHANGER

SPECIFICATION:

INSULATOR: PBT GLASS FIBER REINFORCED  
UL 94VO  
CONTACT: BRASS  
CONTACT PLATING: GOLD PLATED OVER NICKEL  
SHELL: TIN PLATED SHELL  
CURRENT RATING: 5 AMP  
DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE  
INSULATION RESISTANCE: 1,000 MegOHMS MIN @500 VDC  
TEMPERATURE: -55° C - +105° C

NOTE:


LABEL: YELLOW COLOR WITH  
BLACK CHARACTORS  
ONE SIDE: MINI GENDER CHANGER  
OTHER SIDE: U.S.A. PATENT 5199906

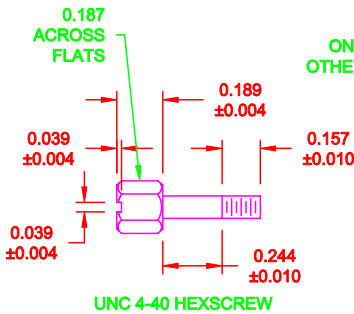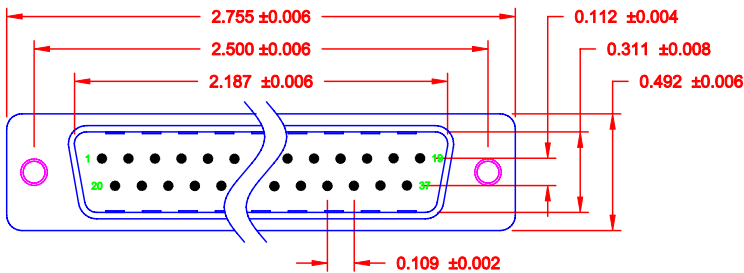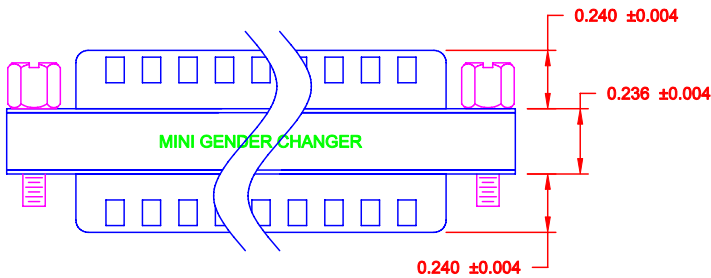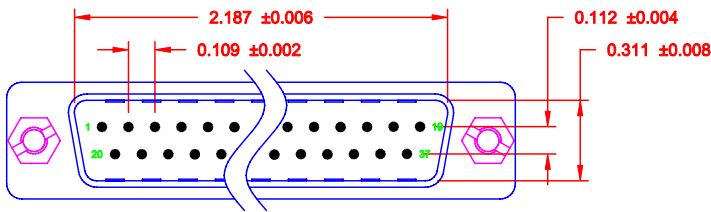

37-PIN MALE		37-PIN MALE
1	---	1
2	---	2
3	---	3
36	---	36
37	---	37
SHELL	---	SHELL
PIN OUT		

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

 <b>NorComp</b>	DRAWN: <b>P. JENKINS</b>		DATE: <b>10-15-07</b>	
	CHECKED:		DATE:	
	SCALE: <b>1.5 : 1</b>	SHEET <b>1</b>	OF <b>1</b>	REV <b>1</b>
DWG NO. <b>GCLP37M37M</b>				