


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DST		REVISIONS			
REV	DATE	BY	CHKD	DESCRIPTION	DATE	BY	APPR
GP	00						
		C		REVISED PER ECO-08-007327	26JAN2009	ZMR	WLM

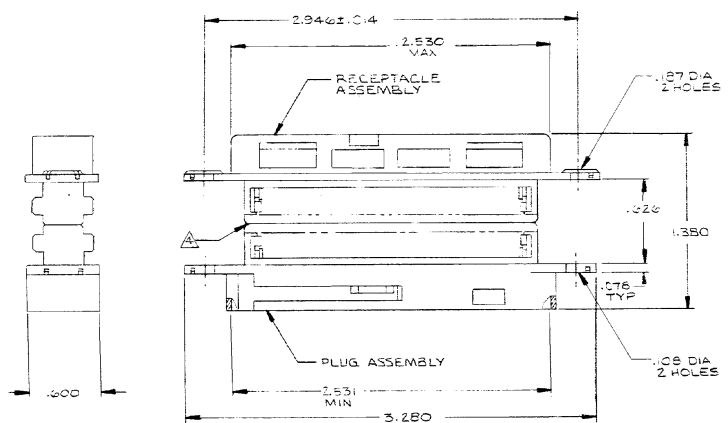

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. MATERIAL:  
 HOUSING - THERMOPLASTIC (BLACK).  
 TERMINAL - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL, ON CONTACT MATING SURFACE, .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
3. WIRE SIZE: 24 & 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS, MAXIMUM INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
4. PLUG AND RECEPTACLE ARE BONDED TOGETHER WITH LIKE NUMBERED CONTACTS COMMON.
5. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
6. CENTER-TO-CENTER SPACING OF TERMINALS IS .085.

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. DATE	BY	CHKD	DATE	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS mm (INCHES)		0	P.L.C.	11/7/80	A.	HOLT	
TOLERANCES UNLESS OTHERWISE SPECIFIED		1	P.L.C.	11/7/80	M.D.	FRIEL	
MATERIAL		2	P.L.C.	11/12/80	S.	HEGE	
FINISH		3	P.L.C.				
APPROVALS		4	P.L.C.				
CUSTOMER DRAWING		5	P.L.C.				
WEIGHT		SIZE		ONE CODE	DRAWING NO.	RESTRICTED TO	
		A2		00779	553258		
SCALE		NTS		SHEET		1 of 1	
				REV		C	

AMP 1471-9 REV 31MAR2000

553258