

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED. REVISIONS PER ECO-11-004587

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		P1		REVISED PER ECO-11-004587	11MAR11	RK	HMR

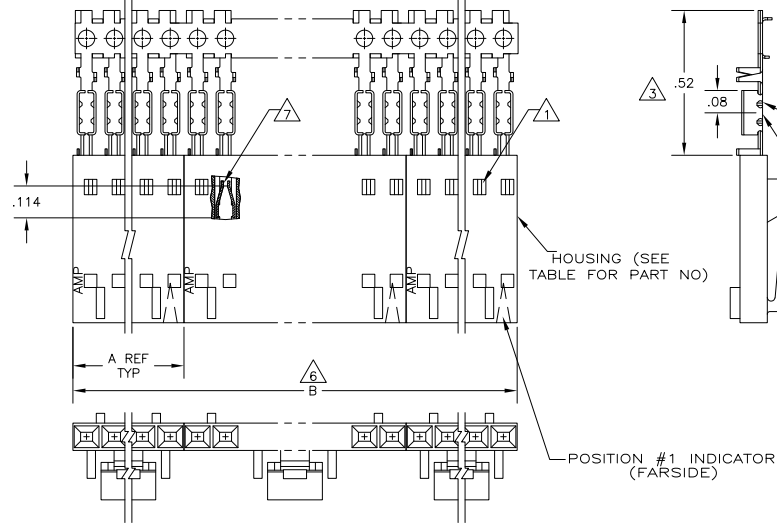

EXAMPLE: STRIP ASSEMBLY SCALE 2:1

△	2	2.40	1.198	1-104257-1	12	6-103956-1
△	2	2.20	1.098	1-104257-0	11	6-103956-0
△	2	2.00	.998	104257-9	10	5-103956-9
△	2	1.80	.898	104257-8	9	5-103956-8
△	2	1.60	.798	104257-7	8	5-103956-7
△	2	1.40	.698	104257-6	7	5-103956-6
△	4	2.39	.598	104257-5	6	5-103956-5
△	4	1.99	.498	104257-4	5	5-103956-4
△	5	1.99	.398	104257-3	4	5-103956-3
△	8	2.40	.298	104257-2	3	5-103956-2
△	10	2.00	.198	104257-1	2	5-103956-1
△	2	1.40	.698	104257-6	7	1-103956-8
△	2	1.60	.798	104257-7	8	1-103956-7
△	4	2.39	.598	104257-5	6	1-103956-6
△	4	1.99	.498	104257-4	5	1-103956-5
△	5	1.99	.398	104257-3	4	1-103956-4
△	8	2.40	.298	104257-2	3	1-103956-3
△	10	2.00	.198	104257-1	2	1-103956-2
△	2	2.40	1.198	1-104257-1	12	1-103956-1
△	2	2.20	1.098	1-104257-0	11	1-103956-0
△	2	2.00	.998	104257-9	10	103956-9
△	2	1.80	.898	104257-8	9	103956-8
△	2	1.60	.798	104257-7	8	103956-7
△	2	1.40	.698	104257-6	7	103956-6
△	4	2.39	.598	104257-5	6	103956-5
△	4	1.99	.498	104257-4	5	103956-4
△	5	1.99	.398	104257-3	4	103956-3
△	8	2.40	.298	104257-2	3	103956-2
△	10	2.00	.198	104257-1	2	103956-1

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- △ USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS.
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS.
- △ FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103645.
- △ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △ MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- △ .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- △ .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- △ PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- △ .000100-.000200 MATTE TIN OVER .000050 NICKEL.

PLATING	△	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
THIS DRAWING IS A CONTROLLED DOCUMENT.						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWG: L. A. MAYER 11-4-06 CHK: P. de Jong 11-12-06 APPD: P. de Jong 11-12-06 PRODUCT SPEC: 108-25034 APPLICATION SPEC: 114-25026 MATERIAL: HOUSING: SEE TABLE FINISH:		
0 PLC ± .010 1 PLC ± .008 2 PLC ± .005 3 PLC ± .003 4 PLC ± .002 ANGLES ± .010				SIZE: 108-25034 (DRAWING NO) RESTRICTED TO: A2 00779 ©=103956 CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 of 1 REV: P1		