

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		M2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

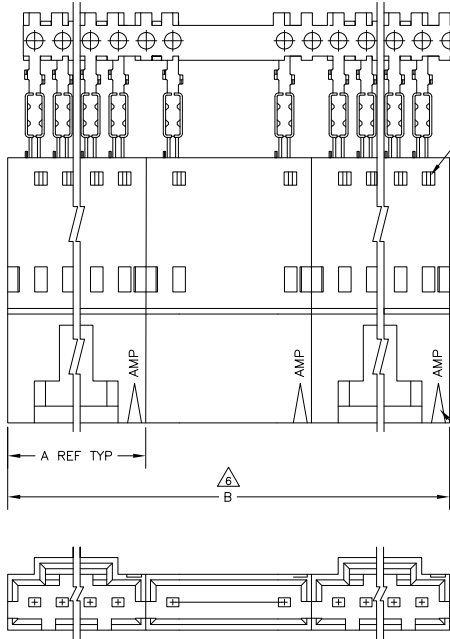

HOUSING (SEE TABLE FOR PART NO.)

POSITION #1 INDICATOR

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

2	2.59	1.295	1-103653-1	12	6-103945-1
2	2.39	1.195	1-103653-0	11	6-103945-0
2	2.19	1.095	103653-9	10	5-103945-9
2	1.99	.995	103653-8	9	5-103945-8
2	1.79	.895	103653-7	8	5-103945-7
3	2.39	.795	103653-6	7	5-103945-6
2	1.39	.695	103653-5	6	5-103945-5
4	2.38	.595	103653-4	5	5-103945-4
4	1.98	.495	103653-3	4	5-103945-3
5	1.98	.395	103653-2	3	5-103945-2
8	2.36	.295	103653-1	2	5-103945-1
4	1.98	.495	103653-3	4	1-103945-7
5	1.98	.395	103653-2	3	1-103945-6
2	2.19	1.095	103653-9	10	1-103945-5
2	1.39	.695	103653-5	6	1-103945-4
4	2.38	.595	103653-4	5	1-103945-3
8	2.36	.295	103653-1	2	1-103945-2
2	2.59	1.295	1-103653-1	12	1-103945-1
2	2.39	1.195	1-103653-0	11	1-103945-0
2	2.19	1.095	103653-9	10	103945-9
2	1.99	.995	103653-8	9	103945-8
2	1.79	.895	103653-7	8	103945-7
3	2.39	.795	103653-6	7	103945-6
2	1.39	.695	103653-5	6	103945-5
4	2.38	.595	103653-4	5	103945-4
4	1.98	.495	103653-3	4	103945-3
5	1.98	.395	103653-2	3	103945-2
8	2.36	.295	103653-1	2	103945-1

OBSOLETE
OBSOLETE

11 SUPERSEDED BY 5-103945-8

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103660
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 10 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 11 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY POSN NUMBER ON STRIP
THIS DRAWING IS A CONTROLLED DOCUMENT.					
DIMENSIONS: INCHES		DESIGNED BY: R. BROWN		DATE: 26JUL00	
MATERIAL: SEE TABLE		CHECKED BY: [blank]		DATE: 26JUL00	
FINISH: [blank]		APPROVED BY: [blank]		DATE: 26JUL00	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		K. WEIGHT: 26JUL00		NAME: SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM	
0 PLG ±		PRODUCT SPEC: 108-25034		SIZE: 108-25026	
1 PLG ±		APPLICATION SPEC: 114-25026		DATE CODE (DRAWING TO): A2	
2 PLG ±		WEIGHT: -		RESTRICTED TO: -	
3 PLG ±		CUSTOMER DRAWING		SCALE: 4:1	
4 PLG ±		DATE: 11MAY00		SHEET: 1 of 1	
5 PLG ±		DATE: 11MAY00		REV: M2	
6 PLG ±		DATE: 11MAY00		REV: M2	
7 PLG ±		DATE: 11MAY00		REV: M2	
8 PLG ±		DATE: 11MAY00		REV: M2	
9 PLG ±		DATE: 11MAY00		REV: M2	
10 PLG ±		DATE: 11MAY00		REV: M2	
11 PLG ±		DATE: 11MAY00		REV: M2	
12 PLG ±		DATE: 11MAY00		REV: M2	