
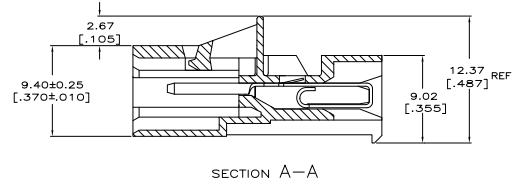

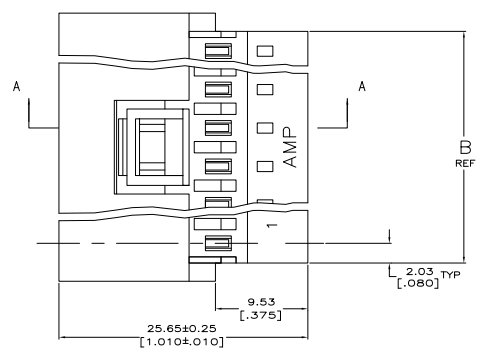


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
CM	0			
C2		REVISED PER EDD-11-009297	12MR11	RK HMR

- MATERIAL: CONNECTOR- NYLON US94V-2 (YELLOW)
 CONTACTS- 0.30 [0.12] THICK COPPER ALLOY
 (BRIGHT TIN-LEAD 0.00203 [0.00080] MIN THK).
 (MATTE TIN 0.00203 [0.00080] MIN THK
 FOR CONTACTS 3-641436-2 THRU 5-641436-4)
- CONTACTS ACCEPT #20 AWG SOLID, FUSED STRANDED
 OR STRANDED (7 STRANDS) WIRE WITH 2.41 [0.95] MAX
 INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [0.06] PER IN.
- HOUSING FEATURES: CLOSED END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



FINISH	Q	E	A	NO. OF CIRCUITS	PART NUMBER
TIN	91.14 (3.588)	95.20 (3.748)	99.06 (3.900)	24	5-641436-4
	55.47 (2.184)	59.54 (2.344)	63.40 (2.496)	15	4-641436-5
	43.59 (1.716)	47.65 (1.876)	51.51 (2.028)	12	4-641436-9
	31.70 (1.248)	35.76 (1.408)	39.62 (1.560)	9	3-641436-9
	19.81 (.780)	23.88 (.940)	27.74 (1.092)	6	3-641436-8
	11.89 (.468)	15.95 (.628)	19.81 (.780)	4	3-641436-4
	7.92 (.312)	11.99 (.472)	15.85 (.624)	3	3-641436-3
	3.96 (.156)	8.03 (.316)	11.89 (.468)	2	3-641436-2
△ (SUPERSEDED)	91.14 (3.588)	95.20 (3.748)	99.06 (3.900)	24	2-641436-4
△ (SUPERSEDED)	55.47 (2.184)	59.54 (2.344)	63.40 (2.496)	15	1-641436-5
	43.59 (1.716)	47.65 (1.876)	51.51 (2.028)	12	1-641436-9
	31.70 (1.248)	35.76 (1.408)	39.62 (1.560)	9	641436-9
	19.81 (.780)	23.88 (.940)	27.74 (1.092)	6	641436-8
	11.89 (.468)	15.95 (.628)	19.81 (.780)	4	641436-4
	7.92 (.312)	11.99 (.472)	15.85 (.624)	3	641436-3
	3.96 (.156)	8.03 (.316)	11.89 (.468)	2	641436-2

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 10-20-11

TE Connectivity
 MTA 156
 POSTED CONNECTOR ASSEMBLY,
 20 AWG

SEE NOTE 1

CUSTOMER DRAWING: A100779G-641436

DATE: 5-1 SHEET: 1 OF 1 REV: G2