

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APP
S2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

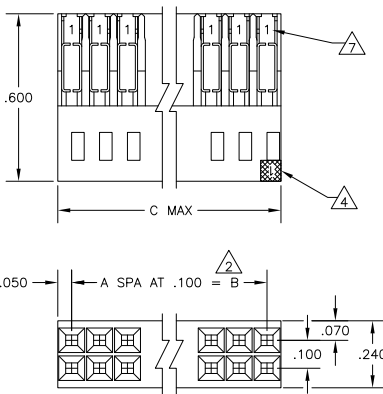

	3.200	3.100	31	64	3	8	102393-0
9 OBSOLETE	3.000	2.900	29	60	3	7	102393-8
9 OBSOLETE	2.700	2.600	26	54	3	7	102393-5
	2.500	2.400	24	50	3	7	102393-3
	2.000	1.900	19	40	3	6	102393-8
	1.700	1.600	16	34	3	6	102393-5
9 OBSOLETE	1.600	1.500	15	32	3	6	-4
9 OBSOLETE	1.500	1.400	14	30	3	6	-3
	1.400	1.300	13	28	3	6	-2
	1.300	1.200	12	26	3	6	-1
	1.200	1.100	11	24	3	6	-0
9 OBSOLETE	1.100	1.000	10	22	3	5	-9
	1.000	.900	9	20	3	5	-8
	.900	.800	8	18	3	5	-7
	.800	.700	7	16	3	5	-6
	.700	.600	6	14	3	5	-5
	.600	.500	5	12	3	5	-4
	.500	.400	4	10	3	5	-3
	.400	.300	3	8	3	5	-2
	.300	.200	2	6	3	5	102393-1
	C	B	A	NO OF POS	ASSEMBLY PART NUMBER		

	3.600	3.500	35	72	3	102393-4
SUPERSEDED	3.500	3.400	34	70	3	-3
	3.400	3.300	33	68	3	-2
	3.300	3.200	32	66	3	-1
	3.200	3.100	31	64	3	-0
SUPERSEDED	3.100	3.000	30	62	2	-9
	3.000	2.900	29	60	2	-8
SUPERSEDED	2.900	2.800	28	58	2	-7
SUPERSEDED	2.800	2.700	27	56	2	-6
9 OBSOLETE	2.700	2.600	26	54	2	-5
SUPERSEDED	2.600	2.500	25	52	2	-4
	2.500	2.400	24	50	2	-3
	2.400	2.300	23	48	2	-2
SUPERSEDED	2.300	2.200	22	46	2	-1
	2.200	2.100	21	44	2	-0
	2.100	2.000	20	42	1	-9
	2.000	1.900	19	40	1	-8
SUPERSEDED	1.900	1.800	18	38	1	-7
SUPERSEDED	1.800	1.700	17	36	1	-6
9 OBSOLETE	1.700	1.600	16	34	1	-5
	1.600	1.500	15	32	1	-4
	1.500	1.400	14	30	1	-3
9 OBSOLETE	1.400	1.300	13	28	1	-2
	1.300	1.200	12	26	1	-1
9 SUPERSEDED	1.200	1.100	11	24	1	-0
9 OBSOLETE	1.100	1.000	10	22	1	-9
	1.000	.900	9	20	1	-8
	.900	.800	8	18	1	-7
	.800	.700	7	16	1	-6
	.700	.600	6	14	1	-5
	.600	.500	5	12	1	-4
	.500	.400	4	10	1	-3
9 SUPERSEDED	.400	.300	3	8	1	-2
	.300	.200	2	6	1	102393-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

- 1 .000030 GOLD IN THE CONTACT AREA, .000050-.000100 TIN-LEAD IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 2 TOLERANCE NON-CUMULATIVE.
- 3 .000030 GOLD IN THE CONTACT AREA, .000050-.000100 TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 4 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 5 OBSOLETE PART NUMBER
- 6 USE WITH 26-30 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 7 CONTACT IDENTIFICATION NUMBER "1" LOCATED IN THIS AREA.
- 8 AMP TRADEMARK (EITHER SIDE).
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNER: L.D.RINGLEY 7-1-85	DATE: 7-1-85
CHK: P.C.deJONG 7-1-85	DATE: 7-1-85
APP: P.C.deJONG 7-1-85	DATE: 7-1-85
PRODUCT SPEC: --	SIZE: A2
APPLICATION SPEC: --	CAGE CODE: 00779
FINISH: --	REV: 1
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK	SCALE: 4:1
CONTACTS: PHOS BRONZE	SHEET: 1 of 1
CONTACTS: SEE TABLE	REV: S2

TE Connectivity  
ASSEMBLY, MASS TERMINATION, AMPMODU, DOUBLE ROW, .100 X .100 CL, #26-#30 AWG WIRE SIZE