


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
R2		REVISED PER EDD-11-004587			

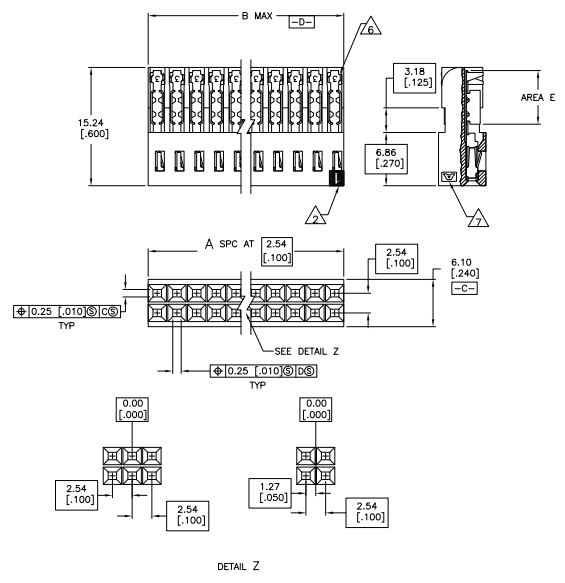

- △ HOUSING: PBT, UL 94V-0 RATED, COLOR-BLACK
CONTACTS: COPPER ALLOY PER ASTM B103
- △ MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- △ 0.00076[0.00030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [0.00050-0.00100] TIN-IN-LEAD IN AREA E, ALL OVER 0.00127[0.00050] MIN NICKEL.
- △ 0.00076[0.00030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [0.00050-0.00100] TIN IN AREA E, ALL OVER 0.00127[0.00050] MIN NICKEL.
- 5. USE WITH #20-#22 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- △ CONTACT IDENTIFICATION NUMBER "3" LOCATED IN THIS AREA.
- △ AMP TRADEMARK (EITHER SIDE).
- △ OBSOLETE PART NUMBER.
- △ ROHS 2002/95/EC COMPLIANT.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

REV	DATE	DESCRIPTION	BY	CHK	APP	
△	△	81.28 [3.200]	31	64	5-102448-0	
△	△	76.20 [3.000]	29	60	7-102448-8	
△	△	63.50 [2.500]	24	50	7-102448-3	
△	△	50.80 [2.000]	19	40	6-102448-8	
△	△	43.18 [1.700]	16	34	6-102448-5	
△	△	40.64 [1.600]	15	32	6-102448-4	
△	△	38.10 [1.500]	14	30	6-102448-3	
△	△	35.56 [1.400]	13	28	6-102448-2	
△	△	33.02 [1.300]	12	26	6-102448-1	
△	△	30.48 [1.200]	11	24	6-102448-0	
△	△	27.94 [1.100]	10	22	5-102448-9	
△	△	25.40 [1.000]	9	20	5-102448-8	
△	△	22.86 [0.900]	8	18	5-102448-7	
△	△	20.32 [0.800]	7	16	5-102448-6	
△	△	17.78 [0.700]	6	14	5-102448-5	
△	△	15.24 [0.600]	5	12	5-102448-4	
△	△	12.70 [0.500]	4	10	5-102448-3	
△	△	10.16 [0.400]	3	8	5-102448-2	
△	△	7.62 [0.300]	2	6	5-102448-1	
△	△					
		FINISH	B	A	NO. OF POSN	PART NO.

△	△	91.44 [3.600]	35	72	3-102448-4	
△	△	88.90 [3.500]	34	70	3-102448-3	
△	△	86.36 [3.400]	33	68	3-102448-2	
△	△	83.82 [3.300]	32	66	3-102448-1	
△	△	81.28 [3.200]	31	64	3-102448-0	
△	△	78.74 [3.100]	30	62	2-102448-9	
△	△	76.20 [3.000]	29	60	2-102448-8	
△	△	73.66 [2.900]	28	58	2-102448-7	
△	△	71.12 [2.800]	27	56	2-102448-6	
△	△	68.58 [2.700]	26	54	2-102448-5	
△	△	66.04 [2.600]	25	52	2-102448-4	
△	△	63.50 [2.500]	24	50	2-102448-3	
△	△	60.96 [2.400]	23	48	2-102448-2	
△	△	58.42 [2.300]	22	46	2-102448-1	
△	△	55.88 [2.200]	21	44	2-102448-0	
△	△	53.34 [2.100]	20	42	1-102448-9	
△	△	50.80 [2.000]	19	40	1-102448-8	
△	△	48.26 [1.900]	18	38	1-102448-7	
△	△	45.72 [1.800]	17	36	1-102448-6	
△	△	43.18 [1.700]	16	34	1-102448-5	
△	△	40.64 [1.600]	15	32	1-102448-4	
△	△	38.10 [1.500]	14	30	1-102448-3	
△	△	35.56 [1.400]	13	28	1-102448-2	
△	△	33.02 [1.300]	12	26	1-102448-1	
△	△	30.48 [1.200]	11	24	1-102448-0	
△	△	27.94 [1.100]	10	22	102448-9	
△	△	25.40 [1.000]	9	20	102448-8	
△	△	22.86 [0.900]	8	18	102448-7	
△	△	20.32 [0.800]	7	16	102448-6	
△	△	17.78 [0.700]	6	14	102448-5	
△	△	15.24 [0.600]	5	12	102448-4	
△	△	12.70 [0.500]	4	10	102448-3	
△	△	10.16 [0.400]	3	8	102448-2	
△	△	7.62 [0.300]	2	6	102448-1	
		FINISH	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT. THE ONLY VALID COPY IS THE ORIGINAL.

108-25015
 114-25032
 100779

AMPMODU MT, RCPT ASSY,
 STANDARD PRESSURE CONTACTS
 FOR 20-22 AWG WIRE SIZE

TE Connectivity

REVISIONS: 4.1