

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		J2		REVISED PER ECO-11-004917	11MAR11	RK	HMR

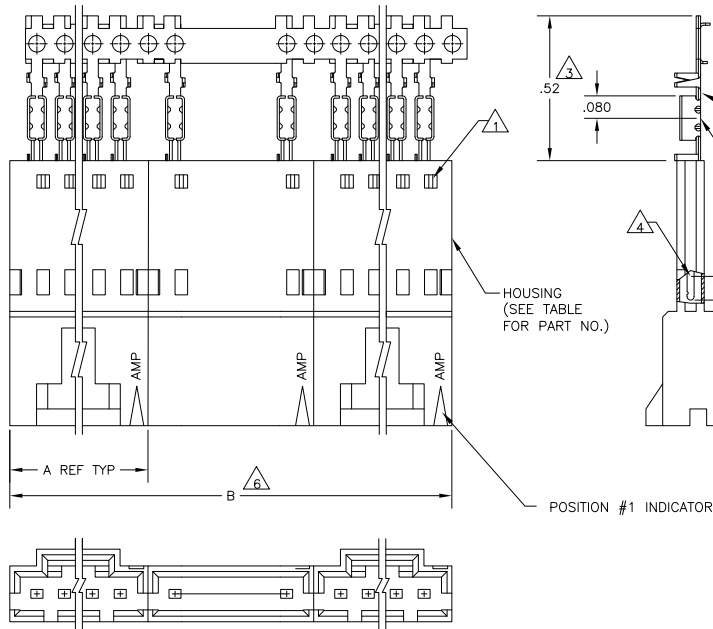

OBSOLETE	2	2.59	1.295	1-103653-1	12	6-103948-1
OBSOLETE	2	2.39	1.195	1-103653-0	11	6-103948-0
OBSOLETE	2	2.19	1.095	103653-9	10	5-103948-9
OBSOLETE	2	1.99	.995	103653-8	9	5-103948-8
	2	1.79	.895	103653-7	8	5-103948-7
OBSOLETE	3	2.39	.795	103653-6	7	5-103948-6
	2	1.39	.695	103653-5	6	5-103948-5
	4	2.38	.595	103653-4	5	5-103948-4
	4	1.98	.495	103653-3	4	5-103948-3
	5	1.98	.395	103653-2	3	5-103948-2
	8	2.36	.295	103653-1	2	5-103948-1
OBSOLETE	2	2.59	1.295	1-103653-1	12	1-103948-1
OBSOLETE	2	2.39	1.195	1-103653-0	11	1-103948-0
	2	2.19	1.095	103653-9	10	103948-9
	2	1.99	.995	103653-8	9	103948-8
	2	1.79	.895	103653-7	8	103948-7
	3	2.39	.795	103653-6	7	103948-6
	2	1.39	.695	103653-5	6	103948-5
	4	2.38	.595	103653-4	5	103948-4
	4	1.98	.495	103653-3	4	103948-3
	5	1.98	.395	103653-2	3	103948-2
	8	2.36	.295	103653-1	2	103948-1
PLATING	A	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103658
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	APPROVED FOR RELEASE	DATE
0 PLG ± .005	R. BROWN	26JUL00
1 PLG ± .005	OK	26JUL00
2 PLG ± .005	K. WRIGHT	26JUL00
3 PLG ± .005	APPROVED	26JUL00
4 PLG ± .005	DATE	26JUL00
5 PLG ± .005	NAME	26JUL00
6 PLG ± .005	PRODUCT SPEC	26JUL00
7 PLG ± .005	108-25034	26JUL00
8 PLG ± .005	APPLICATION SPEC	26JUL00
9 PLG ± .005	114-25026	26JUL00
10 PLG ± .005	SIZE	26JUL00
11 PLG ± .005	114-25026	26JUL00
12 PLG ± .005	WEIGHT	26JUL00
13 PLG ± .005	RIGHT	26JUL00
14 PLG ± .005	SEE TABLE	26JUL00
15 PLG ± .005	CUSTOMER DRAWING	26JUL00

TE Connectivity

SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE 108-25034 (FORMING NO) RESTRICTED TO A2 00779 C=103948

SCALE 4:1 SHEET 1 of 1 REV J2