

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APVD
		M2		REVISED PER ECO-11-004917	11MAR11	RK	HMR

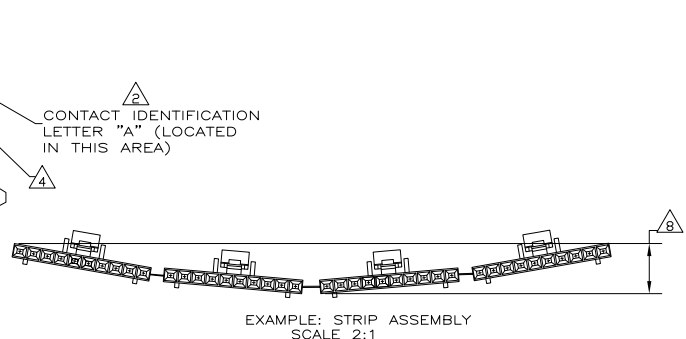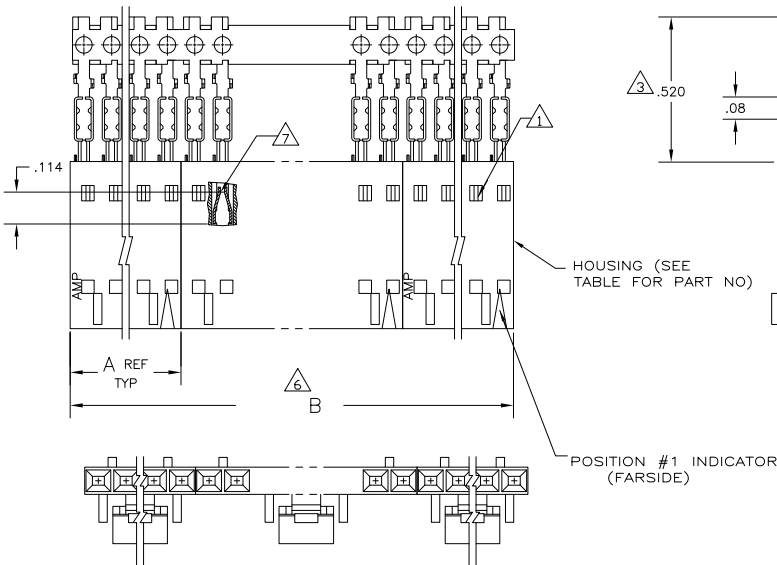

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103641
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED, SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 10 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

QTY	PLATING	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	
2			1.198	1-104257-1	12	6-103959-1	
2			2.20	1-104257-0	11	6-103959-0	
2			2.00	.998	104257-9	10	5-103959-9
2			1.80	.898	104257-8	9	5-103959-8
2			1.60	.798	104257-7	8	5-103959-7
2			1.40	.698	104257-6	7	5-103959-6
4			2.39	.598	104257-5	6	5-103959-5
4			1.99	.498	104257-4	5	5-103959-4
5			1.99	.398	104257-3	4	5-103959-3
8			2.40	.298	104257-2	3	5-103959-2
10			2.00	.198	104257-1	2	5-103959-1
5			1.99	.398	104257-3	4	1-103959-3
4			1.99	.498	104257-4	5	1-103959-2
2			2.40	1.198	1-104257-1	12	1-103959-1
2			2.20	1.098	1-104257-0	11	1-103959-0
2			2.00	.998	104257-9	10	103959-9
2			1.80	.898	104257-8	9	103959-8
2			1.60	.798	104257-7	8	103959-7
2			1.40	.698	104257-6	7	103959-6
4			2.39	.598	104257-5	6	103959-5
4			1.99	.498	104257-4	5	103959-4
5			1.99	.398	104257-3	4	103959-3
8			2.40	.298	104257-2	3	103959-2
10			2.00	.198	104257-1	2	103959-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: A. MAYER 11-4-06
 CHECKED BY: P. de Jong 11-12-06
 APPROVED BY: P. de Jong 11-12-06

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

MATERIAL: HOUSING: SEE TABLE
 FINISH: SEE TABLE

SIZE: A2
 DATE CODE: 00779
 DRAWING NO: 103959

TE Connectivity
 RCPT ASSY, AMPMODU MTE, SINGLE ROW .100 C/L, LATCHED AND POLARIZED FOR #26-#30 AWG WIRE SIZE, STRIP FORM

CUSTOMER DRAWING
 SCALE: 4:1
 SHEET: 1 of 1
 REV: M2